


Customer N°:	Customer reference:	Order form date:			
Delivery address: Surname:					
The B measurment must be greater than or equal to 40 cm C: Coping overhang =cm Water Decking					
STORAGE BAG					
Yes No					
FITTINGS					
SAFETY FITTINGS By choosing safety fittings the cove compliant with the NF P90-308 Free ANCHOR Standard: Plastic wall hook + screw Option: Stainless steel wall hook + screy TENSION Bungee-clic	ew	NON-SAFETY FITTINGS ANCHOR Standard: Stop hook Options: Stainless steel wall hook + screw Plastic wall hook + screw TENSION Standard: Beige continuous elastic strap			
For full compliance with the NF P90-301 that all the elements composing this safe come from CF group.					

Customer N°:	Customer reference:	Order form date:	Company:

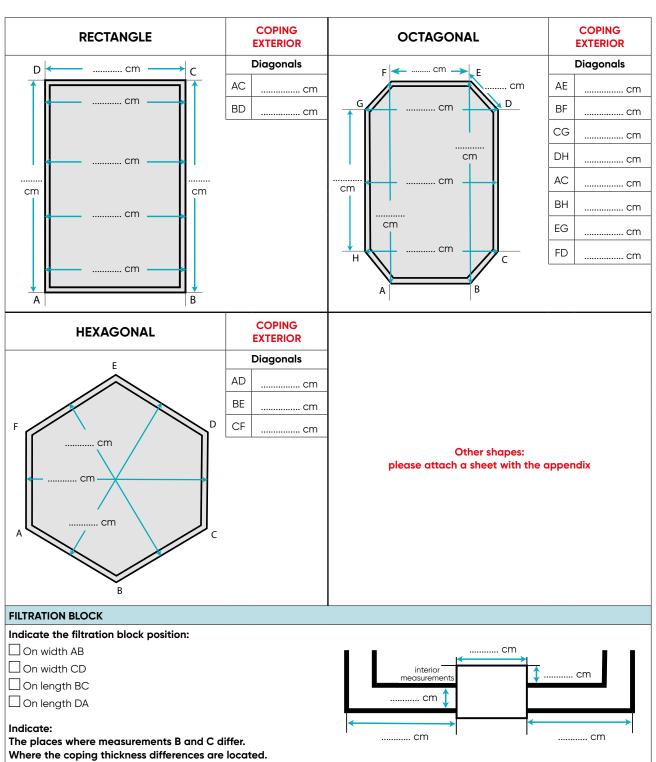


POOL DRAWING - TRIANGULATION

Customer N°:	Customer reference:	Order form date:	Company:



TAKING MEASUREMENTS USING TRIANGULATION

- 1 Trace to points A and B using a chalk on the pool at the locking unit level. It is important that A and B be spaced at a maximum from each other while keeping the possibility of making all measurements in a straight line.
- 2 Divide the pool boundary into spaces of about 50 cm and number them using a chalk 1, 2, 3, etc.
- 3 Fill in the document.

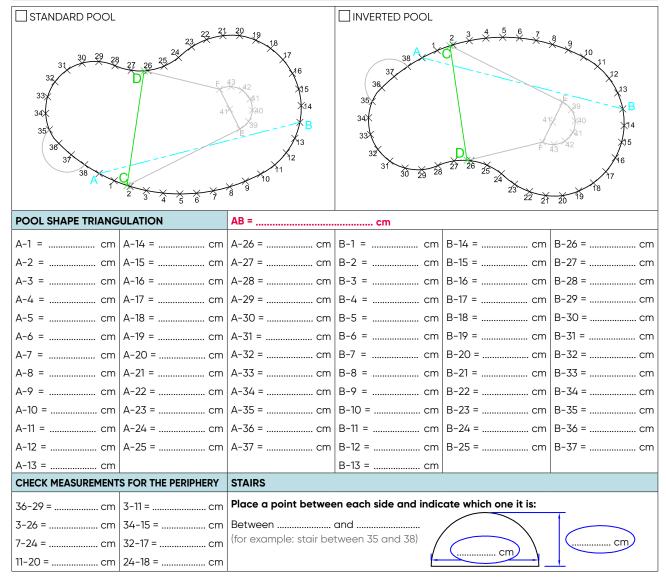

IF THIS ORDER FORM IS USED FOR A LINER, PLEASE ALSO FILL IN PART BELOW: Please place points C and D on either side of the sloping line.

COVING (wall/bottom)	Radius =cm			
MEASUREMENTS TAKEN ABOVE (At the foot of the wall, at the bottom of the pool)	POOL BOTTOM TRIANGULATION	DEPTH AT POINTS		
AC = cm CE = cm 32-C = cm	E39 = cm F39 = cm	C = cm 32 = cm		
AD = cm CF = cm 32-D = cm	E40 = cm F40 = cm	8 = cm 36 = cm		
BC = cm DF = cm 10-E = cm	E41 = cm F41 = cm	B = cm E = cm		
BD = cm DE = cm 15-41 = cm	E42 = cm F42 = cm	20 = cm 41 = cm		
CD = cm EF = cm 23-F = cm	E43 = cm F43 = cm	D = cm F = cm		
	41-41' =cm	29 = cm		
	IMPORTANT			

If the stair has a special shape, don't hesitate to take a photo.