WINTER COVER - COVEA PRIMA FOR IN-GROUND POOL - 1/2 DEL

Customer N°:	Customer reference:		Order form date:		
Company contact details:		Delivery address:			
Surname:		Name:			
Postcode: City:		Address:			
Country:		Postcode:	City:		
Phone:		_			
E-mail:		Phone (person to cor	ntact)		
Contact in case of missing measu	Contact in case of missing measurements:		Access: Semi-trailer Carrier Other:		
		☐ Pick up at DEL Saint-Rémy-de-Provence factory			
		(13210, Saint-Rémy-de-Provence, FRANCE)			
New pool Existing pool: to avoid re-taking the measurements, please indicate the invoice n°, order n° or delivery document n° for the original cover:					
COLOURS					
Blue					
REQUIRED OVERLAP (pool size + 35 cm	n by default)				
cm on either side					
STAIRS					
☐ Yes ☐ No					
SHAPE					
Square Roman] Trapezoid				
ACCESSORIES					
Storage bag	Yes No				
Support wires for concrete coping	☐ Yes ☐ No				
Support wires for wooden coping	Yes No				
			* The support wires are required for snow regions.		
FITTINGS					
ANCHOR					
Standard:					
P anchor					
Option: O Lawn anchor					
Lawn and lo					
TENSION					
Standard:					
Beige continuous elastic strap					
Options: Beige 2 end elastic strap					
Grey 2 end elastic strap					
<u> </u>					

Customer N°:

Order form date:

Company:

Customer reference:

STAIRS		Inside	oool measureme	nts	
Indicate the stair position (the measurements must be taken from above): On width AB On width CD On length AD On length BC		H	ocornicasareme	G	
POOL	↓ ·			F	
1 Indicate the inside pool measurements 2 Diagonal AC =	•	cm	cm	cm	
Diagonals taken at sharp corners.	<u> </u>				
FILTRATION BLOCK - FILTRATION PANEL	1		radius	\	
If filtration block, indicate the measurements on the diagram	cm		cm	1	
M C M C H		E cm	cm	Fcm	
Block - panel reference:		-	cm _		
Width L =cm	↑ D			С	1
Width of the block out of the water M = cm					
Depth P =cm					
Block/coping height H =cm					
a. Block position =					
b. Block position =cm c. Depth on the coping =cm					
Indicate the filtration block position:					
On width AB					
☐ On width CD	1				1
ADDITIONAL INDICATIONS IF REQUIRED	cm				cm
ADDITIONAL INSTOATIONS II REQUIRED					
	A			В	
					▼
		-	cm _	→	
·					


POOL DRAWING - TRIANGULATION

Customer N°:	Customer reference:	Order form date:	Company:



TAKING MEASUREMENTS USING TRIANGULATION

- 1 Trace to points A and B using a chalk on the pool at the locking unit level. It is important that A and B be spaced at a maximum from each other while keeping the possibility of making all measurements in a straight line.
- 2 Divide the pool boundary into spaces of about 50 cm and number them using a chalk 1, 2, 3, etc.
- 3 Fill in the document.

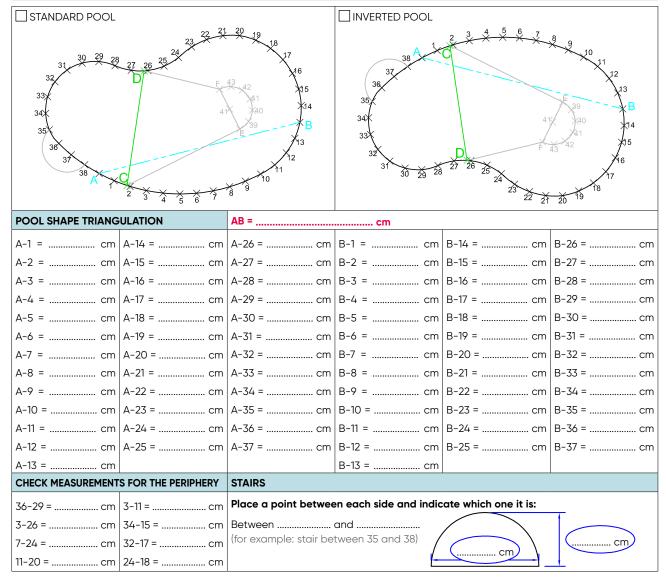

IF THIS ORDER FORM IS USED FOR A LINER, PLEASE ALSO FILL IN PART BELOW: Please place points C and D on either side of the sloping line.

COVING (wall/bottom)	Radius =cm			
MEASUREMENTS TAKEN ABOVE (At the foot of the wall, at the bottom of the pool)	POOL BOTTOM TRIANGULATION	DEPTH AT POINTS		
AC = cm CE = cm 32-C = cm	E39 = cm F39 = cm	C = cm 32 = cm		
AD = cm CF = cm 32-D = cm	E40 = cm F40 = cm	8 = cm 36 = cm		
BC = cm DF = cm 10-E = cm	E41 = cm F41 = cm	B = cm E = cm		
BD = cm DE = cm 15-41 = cm	E42 = cm F42 = cm	20 = cm 41 = cm		
CD = cm EF = cm 23-F = cm	E43 = cm F43 = cm	D = cm F = cm		
	41-41' =cm	29 = cm		
	IMPORTANT			

If the stair has a special shape, don't hesitate to take a photo.