

Customer N°:	Customer reference	: Or	rder form date:	
Company contact details:		Delivery address:		
Surname:		Name:		
Postcode: City:		Address:		
Country: Phone:		Postcode:	City:	
E-mail:		Country:		
Contact in case of missing measu	ırements:	Access: Semi-trailer	Carrier Other:	
		Fill in the truck access checking guide on p. 103.		
		☐ Pick up at DEL Brécé	factory (35530 Brécé, FRANCE)	
☐ New build pool ☐ Existing po			ents of the pool, please indicate the invoice original cover made:	
If all the information is not complete	d, your order cannot be pro	ocessed and therefore put into p	production with the announced leadtime.	
END-STAND COLOUR				
☐ White ☐ Beige ☐ Grey				
CLOSING CONTROLS				
Maintain contact (default choice) Impulse on				
SLATS				
Opaque PVC 84 slats				
Choose PVC opaque 69 slats for p	ool widths of 5.05m or mo	ore.		
White Grey				
Solar polycarbonate slats - 69 mm (Crystal black Silver Leave one slat out of three wit By default, all endcaps will be inst	Crystal blue* Chout end cap to ease	Crystal* Crystal brow the sliding of the slats: O A	<u> </u>	
Opaque PVC 69 slats White Beige Grey	☐ Blue*			
C Leave one slat out of three wit		the sliding of the slats: O A	AD side OBC side	
By default, all endcaps will be inst	called.	Additional le	ad time for slats over 6 m long. *Additional lead time	
STAIRS OR SLAT CUT-OUT				
Roman stair Square stair	Trapezoid stair	Slat cut-out (atta	ch a plan)	
LOCKING KITS	·			
□ Pushlock ○ White ○ Beige ○ Grey ○) Dark grey OBlue	Argile green	Fittings:	
Quicklock + Tool (only for opaque P	VC 69 and solar polycarbo	onate slats)	Surface mount Hanging mount High hanging mount (Pushlock only)	
White straplock kit (only for opaque PVC 69 and solar polycarbonate slats) Concrete coping anchors Wood coping anchors			Linginaliging mount (Pushlock offly)	
WINTER SHIFT / PROTECTIVE COVE	RING			
Ivernea: Yes Fill in the order	. =			

Customer N°: Customer reference:	Order form date: Company:
POOL TYPE	INTERIOR POOL DIMENSIONS BE TAKEN AT THE WATER LINE AFTER WATERTIGHTNESS HAS BEEN MADE
Polyester shell - Brand: Model: Concrete Resin Wood Polystyrene block Metal	Skimmer thickness Flush Proud of
WATERTIGHTNESS	Stairs (see p. 100).
☐ Liner* ☐ On-site lining ☐ Tiles ☐ Coated ☐ Other: * For a sharp radius liner, a radius of 5 cm will be made on your slats.	SIDE OPPOSITE THE REEL SYSTEM cm cm cm cm cm cm Skimmer positions C
POOL	Position of the
Diagonals Diagonal AC =cm Diagonal BD =cm	REEL SYSTEM SIDE
Overflow Yes (by default 1 every 4 m on each length)	Position of the
	been installed
□No	skimmer skimmer Skimmer
Infinity control box (we recommend the Pushlock hanging mount kits)	cm cm cm positions
1 INFO	Dcm
For an overflow pool, the hanging mount kits will be delivered in raw stainless-steel.	<u> </u>
Coping overhangcm	Radius: cm Radius: cm Sharp S
skimmer : Indicate the exact skimmer positions.	
: Indicate the positions of the locking kits that have already been installed.	cm
To comply with the French NF P90-308 safety standard, the locking kits must be installed in accordance with our recommendations in the technical instructions leaflet. The positioning of the locking kits will be determined by CF group according to the configuration of your pool. A	cm
detailed plan will be sent to you when your cover is delivered. Limits of use:To comply with all NF P90-308 standards, it is	cm

Limits of use: To comply with all NF P90-308 standards, it is essential that it is essential that all the elements making up this safety cover (mechanics, slats, motorization...) must come from CF group. If this is not the case, we will not be able to issue this certificate.

Limits of use: DEL covers for overflow pools can only be compliant if the pool is equipped with an Infinity box-type device for automatically lowering the water level by at least 2 cm when the cover is closed.

At present, DEL covers with a removable form on a side are

At present, DEL covers with a removable form on a side are not compliant with standard NF P90–308.

Unless the alarm manufacturer specifies otherwise, immersion alarms are not compatible with DEL covers.

DISTANCE BETWEEN WHEELS


Pool width	Max. distance between wheels
2 m	2.35 m
2.50 m	2.85 m
3 m	3.35 m
3.50 m	3.85 m
4 m	4.25 m
4.50 m	4.75 m
5 m	5.45 m



cm


Sharp 🗆

Sharp \square






Key switch location: \square A

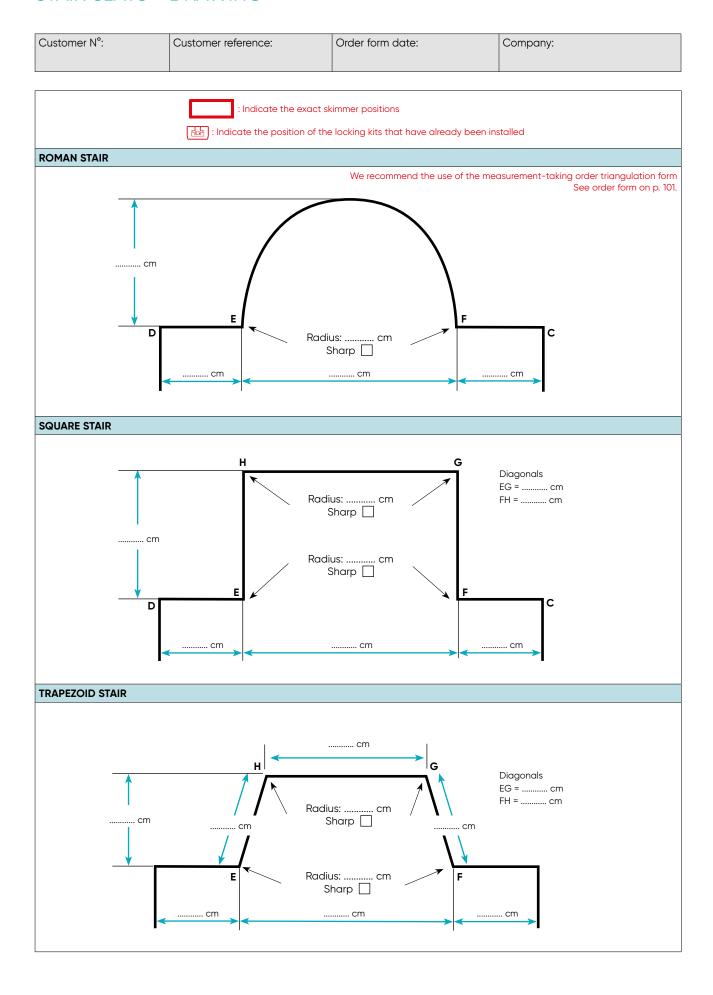

TRIANGULATION DRAWING FOR STAIR SLATS	

Customer N°:	Customer reference:	Order form date:	Company:




Corner radius C =cm

Corner radius D =cm

Corner radius E =cm

Corner radius F =cm

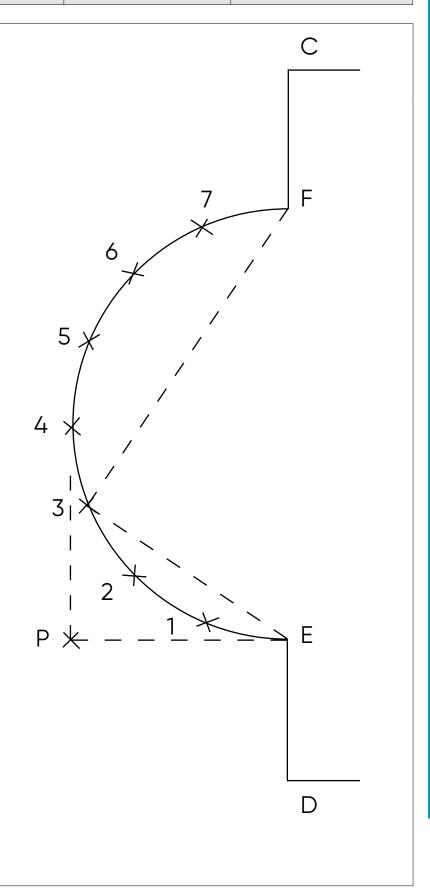

TRUCK ACCESS CHECKING GUIDE

Company name:		Customer reference:	
1 INFO			
To allow us to deliver to you with r	naximum efficiency. plea	se fill in this auestionnaire car	efully. We decline
all liability in the event of the require provided. Any new deliveries will be in	ed delivery location bein	ng inaccessible due to the indi	cations you have
provided. Any new deliveries will be	TVOICEG TO YOU. THAT IK YOU	a for your understanding.	rOnio(
ORDERED EQUIPMENT			
Automatic slatted cover	ar cover Bubble c	over (over 4.50 m) Pool P	kits solutions/above-ground pools
ROAD SIGNAGE LEADING TO THE RE	QUESTED DELIVERY POIL	NT	
Have you already seen this that leads to the requested		oad	
Yes If so, please indicate which one	es:		
ACCESS TO THE REQUESTED DELIVER	RY POINT: TYPES OF VEHI	CLE LIKELY TO HAVE ACCESS	
Below are different vehicle types. Indi	cate which types are like	y to be able to pass in front of	the requested delivery location.
0-00-00-00			
			-0-0-0
Tractor + trailer (38 tonnes):	Semi-trailer (38 tonne	es): Small carrier (19 tonne Yes No	Sitiali track (<0 torines).
L res L NO	□ res □ no	Li fes Li No	☐ Yes ☐ No
	0 00		
Garbage trucks:	Concrete mixer trucks	, , , , , , , , , , , , , , , , , , , ,	Small van:
Yes No	Yes No	Yes No	Yes No
TRUCK CLEARANCES: DETAILS			
Be careful of the truck clearance: Is the	ne delivery address subje	ct to one of the below situation	s?
	SVI	STED OF	
	STATE		86
0-00-00-	0	-00-00-	
Electric cables: Yes No	Low branches: Y	es 🗆 No Corn	ers of roads: 🗆 Yes 🔻 No
OTHER INDICATIONS, PLEASE DESCR	IBE		

IVERNEA & IVERNEA PLUS WINTER PROTECTION COVERS

Customer N°:	Customer reference	e:	Order form date:		
Company contact details:		Delivery address:			
Surname:		Name:			
Postcode: City:		Address:			
Country:		Postcode:	City:		
Phone:					
E-mail:		Phone (person to contact)			
Contact in case of missing measu	rements:	Access: Semi-trailer Carrier Other:			
		Pick up at DEL Brécé factory (35530 Brécé, FRANCE)			
☐ New pool ☐ Existing po			please indicate the invoice		
Caution, Ivernea and Ivernea Plus co	overs are not compati	ble with a solar PVC sla	t cover.		
SLATS					
☐ In-ground (decking above water) ☐	In-ground (decking und	er water) Above-groui	nd (without covering) Above	e-ground (with covering)	
MODEL / COLOUR			cm		
Ivernea:	_				
☐Green ☐Blue ☐Beige ☐Gr	ey	↑D		C↑	
Ivernea plus:					
☐ Ivernea Plus					
POOL DIMENSIONS (for in-ground covers, indicate the size exc	luding the pit)				
Length: cm					
Width: cm					
Diagonals				1	
Diagonal AC = cm		cm		cm	
Diagonal BD =cm					
Diagonals taken at sharp corners. CORNER RADIUS	<u> </u>				
A = cm					
B = cm	1				
C =cm	n				
D =	1	A		В↓	
STAIRS	_			<u> </u>	
☐Yes ☐No		◀	cm		
SHAPE:		^	G		
☐ Square ☐ Roman		Т	٩		
Indicate the stair position:		 cm			
On the AB width On the C			_		
O Along the AD length O Along the	e BC length	<u> </u>	F <u>L</u>		
FILTRATION BLOCK / CUT		~ ~ ~ ~ ~ ~ ~ ~ ~ ~ ~ ~ ~ ~ ~ ~ ~ ~ ~			
Yes (supply a drawing) No		cm	cm	cm	
FITTINGS		<u> </u>			
Bungee-clip					
OPTION		cm	1		
Additional bungee clip(s): quantitive recommended for windy regions.	y:		1		
Additional anchors for windy regions.	ons: quanti-	<u> </u>	F)_		
ty:	·	cm -	cm	cm	
I		cm I	cm	cm	