DEL.	_
D+6	
CE)	
ounced leadtime.	


Slatted Cover Yes No		D+5	D+6	D+7	D+6
				<del></del>	
Customer N°: Customer refe	Customer reference:		Order form date:		
Community contract details:		Delineranandalmassa			
Company contact details:		Delivery address:			
Surname:		Name:			
Postcode: City:		Address:			
Country: Phone:		Postcode:		City:	
E-mail:		Country:		•	
Contact in case of missing measurements:					
Contact in case of missing measurements	•••••	Access: Semi-trail	er ∐Car	rier Other:	
		Fill in the truck access	s checking	guide on p. 103.	
		☐ Pick up at DEL Bré	cé factory	(35530 Brécé, FRA	ANCE)
$\square$ New build pool $\square$ Existing pool: In order to $\square$	avoid t	takina aaain measure	ments of t	he pool inlease in	ndicate the invoice
		mber or reference of the			
·					
If all the information is not completed, your order canno	t be vali	idated and therefore cannot	t be put into p	production within the c	announced leadtime.
WALL UNITS					
Yes No To be delivered: With the	cover	Before the cover	Alrea	dy received	
CONTROLS					
☐ Wi-Key ☐ Key switch ☐ Insert mount key sw	witch (i	indoor use)			
CLOSING CONTROLS					
Maintain contact (default choice) Impulse or	n				
OPTIONS					
Stainless steel tube (for a cale many 4 mg wide)	lv [				
	Yes	∐ No □ N			
Decking weight: -50 kg/m² +50 kg/m²	Yes (	∐ No			
× 0	Yes [	∏No			
Skimmer reinforcement kit	1100 [				
If yes, number:	lv [	□N-			
Liner protection wedge	Yes	∐No			
Tologopie sytopsien	Yes [	□No			
4 nin connector	Yes [	□No			
Mintoring grants	Yes [	□No			
Linex protection	Yes [	□No			
Eveture Mi May amittan	Yes [	□No			
If so indicate the number (max 3):	Yes [	□No			
Remote Wi-Key receiver box					
	Yes [	□No			
If yes, indicate the number:	Yes [	□No			
Middle telescopic support for beams up to 10 m					
	Yes [	□No			
Ø 63 mm	Yes [	□No			
	Yes [	□No			

Customer N:	Customer referer	ice:	Order form date:		Company:	
SLATS						
Opaque PVC 84 slats						
Choose PVC opaque 69	slats for pool width	s of 5.05m or more	e.			
White Grey						
Solar polycarbonate slats  Crystal black Silv  Leave one slat out of By default, all endcaps v	ver Crystal I three without end	blue* Cry	ystal* Crystal be sliding of the slats:	AD side	Crystal green* BC side r slats over 6 m long. *A	dditional lead time
Opaque PVC 69 slats  White Beige  Leave one slat out of By default, all endcaps w	three without end	ue* I cap to ease th	-		BC side	dditional lead time.
STAIRS OR SLAT CUT-OUT						
	ıare stair 🔲 T	Trapezoid stair	□ Slat cut-out (c	ittach a plan)	)	
LOCKING KITS						
□ Pushlock       ○ White ○ Beige ○ Grey ○ Dark grey ○ Blue ○ Argile green       □ Insert mount         □ Quicklock + Tool (only for opaque PVC 69 and solar polycarbonate slats)       ○ Surface mount         ○ White ○ Beige ○ Grey       □ Hanging mount         □ White straplock kit (only for opaque PVC 69 and solar polycarbonate slats)       ○ Concrete coping anchors ○ Wood coping anchors						
BEAM		ı				
		To be delivered Insert mour	n. Indicate the model d: Yes	No Surface		beam.
DECKING						
Smooth IPE decking  Aluminium decking: ○ White ○ Beige ○ Grey Options for aluminium decking: □ Non-slip tape □ Cleaner ○ 75 cm ○ 90 cm ○ Non standard or for indoor pool*: x cm ○ Cut to size ○ Additional decking for automatic slatted cover box  *Additional lead time.						
SECURIWALL						
Yes Fill in the order form on p. 102.						
WINTER SHIFT / PROTECTIVE COVERING						
Ivernea: Yes Fill in Ivernea Plus: Yes Fill in	the order form on the order form on	•				

## ROLLIN - DRAWING - 3/3

Customer N°:	Customer reference:	Order fo	orm date:	Company:	
POOL TYPE		⚠ INTE	RIOR POOL DIMENSION AFTER WATERTIGH	S TO BE TAKEN AT THE ITNESS HAS BEEN MAD	
Polyester shell - Brand: Model:  Concrete Resin Polystyrene block		Skimmer	Proud of	nem on the drawing	
WATERTIGHTNESS		Stairs (see p	o. 100).		
Liner*  Tiles  Other: * For a sharp radius liner, a radius on your slats.		SI cm	DE OPPOSITE THE I	skimmer cm	Skimmer positions
POOL		cm	cm	cmcm	Position of the locking
Diagonal AC =  Diagonal BD =			PIT / REEL SYST	EM SIDE	kits that have already been installed
Overflow		cm	cm	cm cm	Position of the locking
Yes (by default 1 every 4 on AB BC C	_	A	skimmer	skimmer	<ul><li>kits that have already been</li><li>installed</li></ul>
No		<b>←</b>	<b>─</b>	cm	Skimmer
O Infinity control box (we r Pushlock hanging moun	ecommend the it kits)	cm	cm	CIII CIII	positions
1 INFO		D	<	cm > C	
For an overflow pool, the han delivered in raw stainless-stee	ging mount kits will be el.	1		Radius: cm	
Coping overhang			Sharp □	Sharp U	
skimmer : Indicate the exac	t skimmer positions.				
	f the locking kits that have			cm	
already been installed.  To comply with the French NF the locking kits must be instal recommendations in the tech. The positioning of the locking CF group according to the codetailed will be sent to you will be you	led in accordance with our nical instructions leaflet. g kits will be determined by onfiguration of your pool. A	cm	Pool width where will be placed	e the beam	thickness of
ADDITIONAL INDICATIONS	IF REQUIRED		Securiwall	Wall	the safety wall
To comply with all NF P90-308 that it is essential that all the safety cover (mechanics, slats, come from CF group. If this is rable to issue this certificate. Limits of use: DEL covers for ov compliant if the pool is equippy type device for automatically at least 2 cm when the cover if at present, DEL covers with a rare not compliant with standard mare not compliant with standard.	elements making up this , motorization) must not the case, we will not be reflow pools can only be sed with an Infinity box-lowering the water level by s closed.	A	Sharpcm	cm sharp	cm
Unless the alarm manufacture immersion alarms are not com	r specifies otherwise,	<b>○</b>	Distance between	. •	

\*This information determines the dimension of the beam

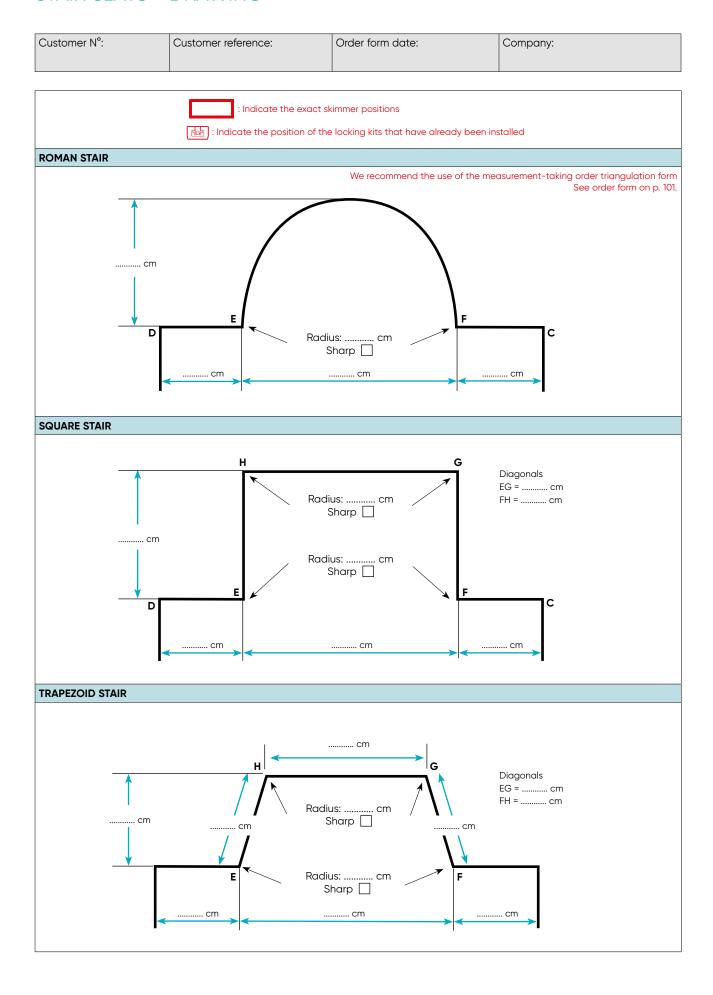

## TRUCK ACCESS CHECKING GUIDE

Company name:		Customer reference:	
1 INFO			
To allow us to deliver to you with m	aximum efficiency, please	fill in this questionnaire carefu	ully. We decline
all liability in the event of the require provided. Any new deliveries will be in	ed delivery location being	inaccessible due to the indica	ations you have
, ,	,	,	rOnrO(
ORDERED EQUIPMENT			
			s solutions/above-ground pools
ROAD SIGNAGE LEADING TO THE REC	QUESTED DELIVERY POINT		
Have you already seen this ty that leads to the requested c		ad	
Yes If so, please indicate which one:	s:		
ACCESS TO THE REQUESTED DELIVERY	Y POINT: TYPES OF VEHICI	LE LIKELY TO HAVE ACCESS	
Below are different vehicle types. Indic	ate which types are likely t	to be able to pass in front of the	e requested delivery location.
0_00_00_00_0	-0-0.0-0.0		-0-0-0-
Tractor + trailer (38 tonnes):	Semi-trailer (38 tonnes)		: Small truck (<6 tonnes):
∐Yes ∐No	∐Yes ∐No	∐ Yes	∐Yes ∐No
	000		
Garbage trucks:	Concrete mixer trucks:	Fuel delivery trucks:	Small van:
Yes No	Yes No	Yes No	Yes No
TRUCK CLEARANCES: DETAILS			
Be careful of the truck clearance: Is the	e delivery address subject	to one of the below situations '	?
	SYL	ATE CONTRACTOR	
	ATT OF THE PARTY O		86
	0	00 00	
Electric cables: 🗆 Yes 🗆 No	Low branches: Tes	□ No Corner	s of roads: Yes No
OTHER INDICATIONS, PLEASE DESCRIE	BE		

## IVERNEA & IVERNEA PLUS WINTER PROTECTION COVERS

Customer N°:	Customer reference	e:	Order form date:		
Company contact details:		Delivery address:			
Surname:		Name:			
Postcode: City:		Address:			
Country:		Postcode:	City:		
Phone:					
E-mail:		· ·	ntact) iler		
Contact in case of missing measu	rements:	l	ecé factory (35530 Brécé, F		
			see factory (55550 bleee, f	NANCE)	
☐ New pool ☐ Existing po			please indicate the invoice		
Caution, Ivernea and Ivernea Plus co	overs are not compati	ble with a solar PVC sla	t cover.		
SLATS					
☐ In-ground (decking above water) ☐	In-ground (decking und	er water) Above-groui	nd (without covering) Above	e-ground (with covering)	
MODEL / COLOUR			cm		
Ivernea:	_				
☐Green ☐Blue ☐Beige ☐Gr	ey	↑D		C↑	
Ivernea plus:					
□ Ivernea Plus					
POOL DIMENSIONS (for in-ground covers, indicate the size exc	luding the pit)				
Length: cm					
Width: cm					
Diagonals				1	
Diagonal AC = cm		cm		cm	
Diagonal BD =cm					
Diagonals taken at sharp corners.  CORNER RADIUS	<u> </u>				
A = cm					
B = cm	1				
C =cm	n				
D =	1	A		В↓	
STAIRS	_			<u> </u>	
☐Yes ☐No		◀	cm	<b></b>	
SHAPE:		<b>^</b>	G		
☐ Square ☐ Roman		Т	٩		
Indicate the stair position:		 cm			
On the AB width On the C			_		
O Along the AD length O Along the	e BC length	<u> </u>	F <u>L</u>		
FILTRATION BLOCK / CUT		~ ~ ~ ~ ~ ~ ~ ~ ~ ~ ~ ~ ~ ~ ~ ~ ~ ~ ~			
Yes (supply a drawing) No		cm	cm	cm	
FITTINGS		<u> </u>			
Bungee-clip					
OPTION		cm	1		
Additional bungee clip(s): quantitive recommended for windy regions.	y:		1		
Additional anchors for windy regions.	ons: quanti-	<u> </u>	F)		
ty:	·	cm -	cm	cm	
I		cm I	cm	cm	