 Speedy fabrication required: <input type="checkbox"/> Yes <input type="checkbox"/> No	FROM NOVEMBER TO MARCH	APRIL	FROM MAY TO AUGUST	SEPTEMBER, OCTOBER
	D+5	D+6	D+7	D+6

Customer N°:	Customer reference:	Order form date:
--------------	---------------------	------------------

Company contact details: Surname: Postcode: City: Country: Phone: E-mail: Contact in case of missing measurements:	Delivery address: Name: Address: Postcode: City: Country: Access: <input type="checkbox"/> Semi-trailer <input type="checkbox"/> Carrier Other: Fill in the truck access checking guide on p. 103. <input type="checkbox"/> Pick up at DEL Brécé factory (35530 Brécé, FRANCE)
--	--

New build pool Existing pool: In order to avoid taking again measurements of the pool, please indicate the invoice number, order number or reference of the original cover made:

! If all the information is not completed, your order cannot be processed and therefore put into production with the announced leadtime.

ROLLINSIDE

1 side 2 sides

WALL UNITS / SEALING KIT Yes **To be delivered:** With the cover Before the cover No (received)

MOTORISATION

In dry pit
 Tubular motor - surface mount
 Tubular motor - insert mount:
 Concrete
 Thin wall without liner:
 Thickness 1 to ≤ 21 mm
 Thickness > 21 to 40 mm
 Thin wall with liner
 Polystyrene block

CONTROLS

Wi-Key Key switch Insert mount key switch (indoor use)

CLOSING CONTROLS



Maintain contact (default choice) Impulse on

OPTIONS

15 m motor cable (for reel system with tubular motor) Yes No
Extra motor cable (from 15 m): 15 + m
Corner edge for radiuses from 5 to 15 cm Yes No
Liner adapter kit Yes No
Liner protection (dry pit model only) Yes No
Wintering crank (dry pit model only) Yes No
6 pin connector (dry pit model only) Yes No
Extra Wi-Key emitter Yes No
 If so, indicate the number (max. 3):
Remote Wi-Key receiver box Yes No
Earth-grounding: Yes No
 ∅ 50 mm Yes No
 ∅ 63 mm Yes No
Junction box Yes No
Junction box gel (Set of 2 cartridges) Yes No

ORDER FORMS

Customer N°:	Customer reference:	Order form date:	Company:
--------------	---------------------	------------------	----------

DEPTH	
Rollinside 1 side (edge/decking distance); standard pit (82 cm):  <input type="checkbox"/> Non standard pit (attach the drawing for study)	Rollinside 2 sides (total pool depth):  <input type="checkbox"/> Non standard pit (attach the drawing for study)
DECKING	<input type="checkbox"/> Yes <input type="checkbox"/> No decking, beams only <input type="checkbox"/> No decking, no beams
Wall units / Sealing kit for beams <input type="checkbox"/> Insert mount To be delivered: <input type="radio"/> With the cover <input type="radio"/> Before the cover <input type="radio"/> Already received <input type="checkbox"/> Surface mount	
Decking <input type="checkbox"/> White PVC decking <input type="checkbox"/> Beige PVC decking <input type="checkbox"/> Grey PVC decking <input type="checkbox"/> PVC decking to be covered <input type="checkbox"/> Aluminium decking to be tiled Middle telescopic support :	
<div style="display: flex; justify-content: space-between;"> <div style="border: 1px solid #00a0e3; padding: 5px; width: 45%;"> <p>i PVC decking only for 82 cm max. pit. For other pit dimensions consult us. For aluminium decking to be tiled only for Rollinside 1 side.</p> </div> <div style="border: 1px solid #00a0e3; padding: 5px; width: 45%; text-align: right;"> <p>i ALUMINIUM DECKING TO BE TILED See recommendation table p. 384 from the export catalogue 2024</p> </div> </div>	
SLATS	
Opaque PVC 84 slats <div style="background-color: #ffe0b2; padding: 5px; margin-bottom: 5px;"> <p>i Choose PVC opaque 69 slats for pool widths of 5.05m or more.</p> </div> <input type="checkbox"/> White <input type="checkbox"/> Grey	
Solar polycarbonate slats - 69 mm (not compatible with bromine treatment) <input type="checkbox"/> Crystal black <input type="checkbox"/> Silver <input type="checkbox"/> Crystal blue* <input type="checkbox"/> Crystal* <input type="checkbox"/> Crystal brown* <input type="checkbox"/> Crystal green* <input type="radio"/> Leave one slat out of three without end cap to ease the sliding of the slats: <input type="radio"/> AD side <input type="radio"/> BC side By default, all endcaps will be installed.	
<small>Additional lead time for slats over 6 m long. *Additional lead time</small>	
Opaque PVC 69 slats <input type="checkbox"/> White <input type="checkbox"/> Beige <input type="checkbox"/> Grey <input type="checkbox"/> Blue* <input type="radio"/> Leave one slat out of three without end cap to ease the sliding of the slats: <input type="radio"/> AD side <input type="radio"/> BC side By default, all endcaps will be installed.	
<small>Additional lead time for slats over 6 m long. *Additional lead time.</small>	
STAIRS OR SLAT CUT-OUT	
<input type="checkbox"/> Roman stair <input type="checkbox"/> Square stair <input type="checkbox"/> Trapezoid stair <input type="checkbox"/> Slat cut-out (attach a plan)	
LOCKING KITS	
Pushlock <input type="checkbox"/> White <input type="checkbox"/> Beige <input type="checkbox"/> Grey <input type="checkbox"/> Dark grey <input type="checkbox"/> Blue <input type="checkbox"/> Argile green	Fittings <input type="checkbox"/> Insert mount <input type="checkbox"/> Surface mount <input type="checkbox"/> Hanging mount <input type="checkbox"/> High hanging mount
WINTER SHIFT / PROTECTIVE COVERING	
Ivernea: <input type="checkbox"/> Yes Fill in the order form on p. 132. <input type="checkbox"/> No Ivernea Plus: <input type="checkbox"/> Yes Fill in the order form on p. 132. <input type="checkbox"/> No	

Customer N°:	Customer reference:	Order form date:	Company:
--------------	---------------------	------------------	----------

POOL TYPE

Polyester shell

- Brand:

- Model:

Concrete Resin Wood

Polystyrene block Metal

WATERTIGHTNESS

Liner * On-site lining

Tiles Coated

Other:


* For a sharp radius liner, a radius of 5 cm will be made on your slats.

POOL

Diagonals

Diagonal AC = cm

Diagonal BD = cm



Overflow

Yes (by default 1 every 4 m on each length) on AB BC CD AD

No

Infinity control box (we recommend the Pushlock hanging mount kits)


INFO

For an overflow pool, the hanging mount kits will be delivered in raw stainless-steel.

Coping overhang

..... cm

skimmer : Indicate the exact skimmer positions.

 : Indicate the positions of the locking kits that have already been installed.

To comply with the French NF P90-308 safety standard, the locking kits must be installed in accordance with our recommendations in the technical instructions leaflet. The positioning of the locking kits will be determined by CF group according to the configuration of your pool. A detailed drawing will be sent to you when your cover is delivered.

ADDITIONAL INDICATIONS IF REQUIRED

To comply with all NF P90-308 standards, it is essential that all the elements making up this safety cover (mechanics, slats, motorization...) must come from CF group. If this is not the case, we will not be able to issue this certificate.

Limits of use: DEL covers for overflow pools can only be compliant if the pool is equipped with an Infinity box-type device for automatically lowering the water level by at least 2 cm when the cover is closed.

At present, DEL covers with a step unit on the length are not compliant with standard NF P90-308.

Unless the alarm manufacturer specifies otherwise, immersion alarms are not compatible with DEL covers.

INTERIOR POOL DIMENSIONS TO BE TAKEN AT THE WATER LINE AFTER WATERTIGHTNESS HAS BEEN MADE



Skimmer thickness

Flush Proud of cm


Skimmers on the widths indicate them on the drawing

Skimmers on the lengths: BC AD

Stairs (see p. 100).

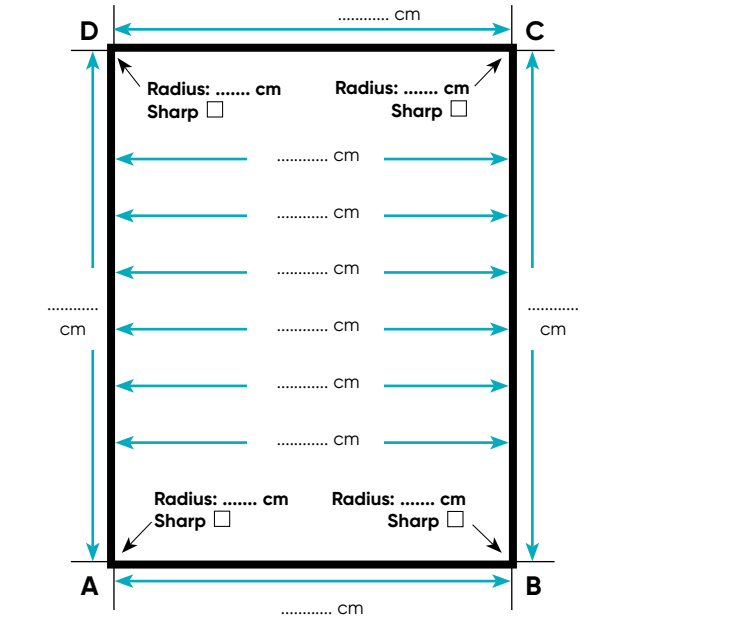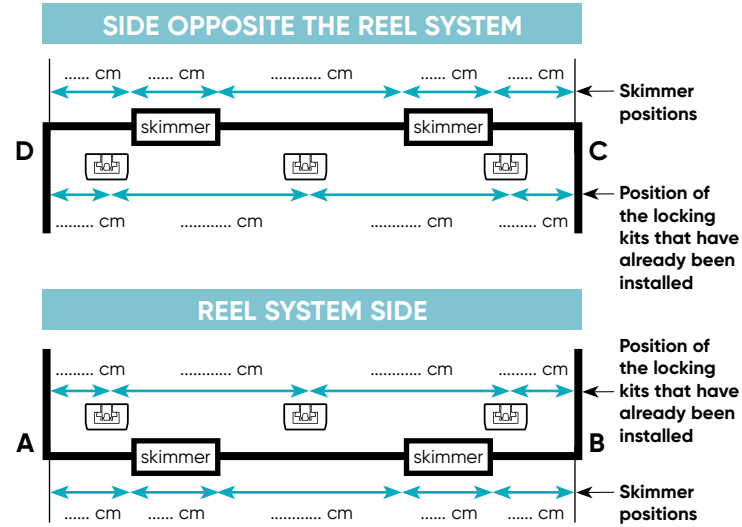

TUBE / REEL SYSTEM SIDE = AB

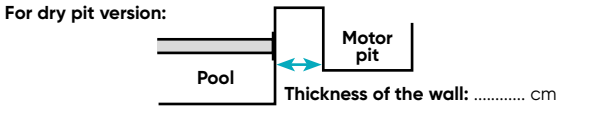

STAIR SLATS - DRAWING


Customer N°:	Customer reference:	Order form date:	Company:
--------------	---------------------	------------------	----------

 : Indicate the exact skimmer positions


 : Indicate the position of the locking kits that have already been installed

ROMAN STAIR


We recommend the use of the measurement-taking order triangulation form
See order form on p. 101.

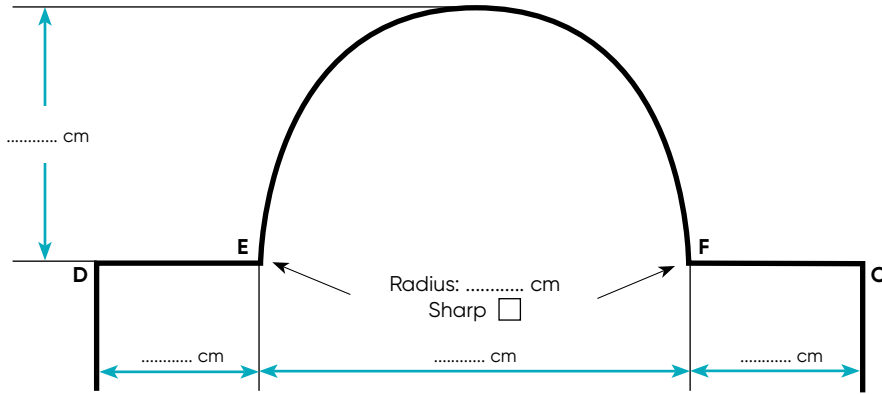

SQUARE STAIR

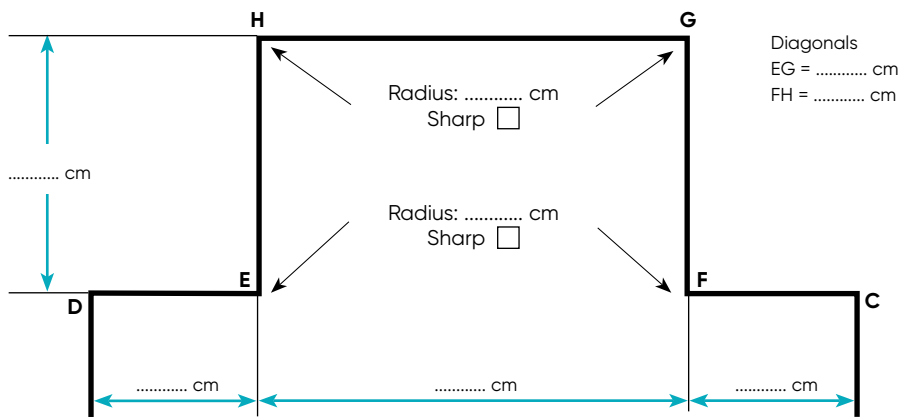

TRAPEZOID STAIR

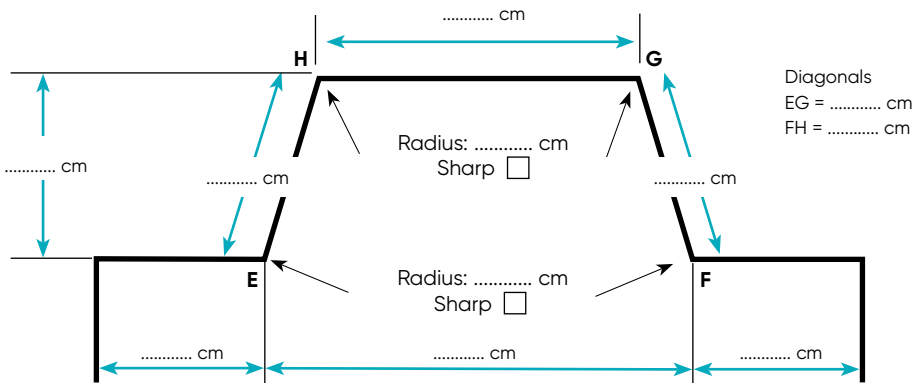

TRIANGULATION DRAWING FOR STAIR SLATS


Customer N°:	Customer reference:	Order form date:	Company:
--------------	---------------------	------------------	----------

CD = cm
 EF = cm
 CF = cm
 ED = cm
 EP = cm

E1 = cm
 E2 = cm
 E3 = cm
 E4 = cm
 E5 = cm
 E6 = cm
 E7 = cm

F1 = cm
 F2 = cm
 F3 = cm
 F4 = cm
 F5 = cm
 F6 = cm
 F7 = cm

Corner radius C =cm
 Corner radius D =cm
 Corner radius E =cm
 Corner radius F =cm

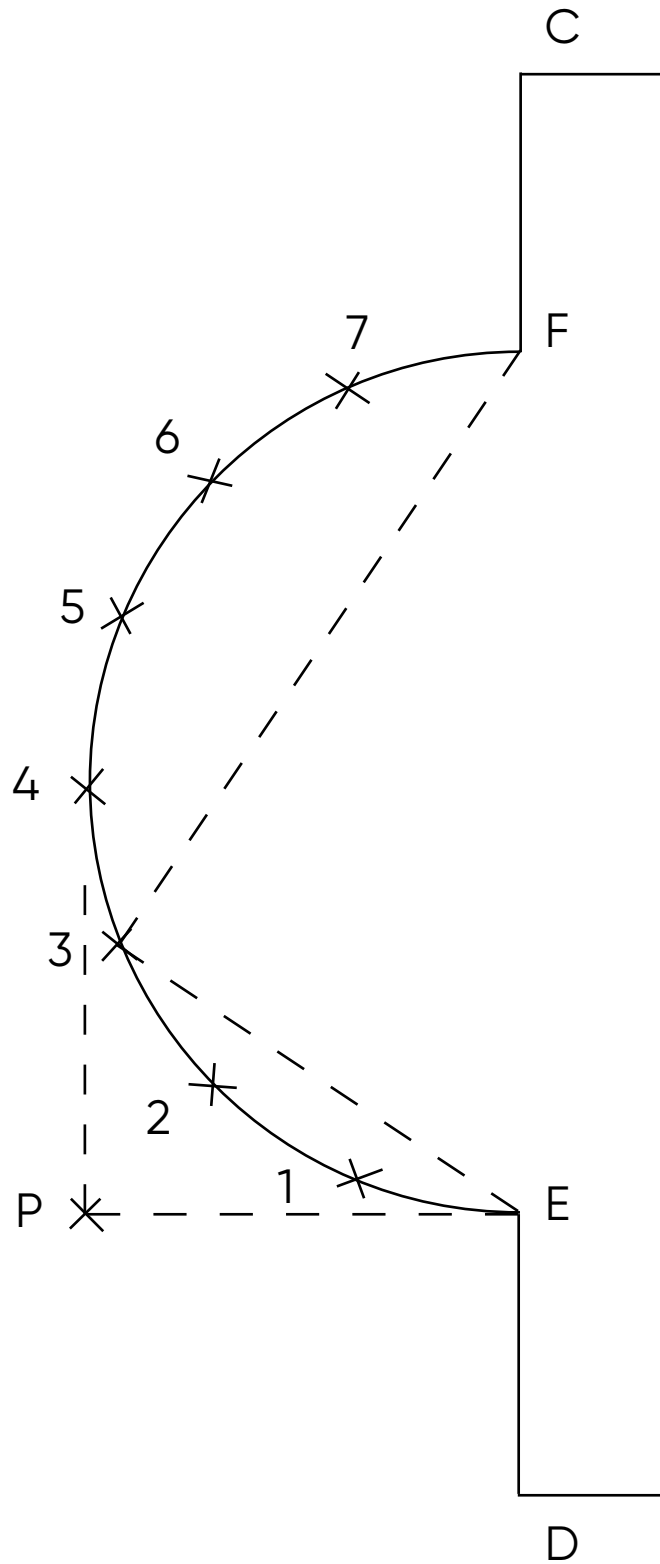

TRUCK ACCESS CHECKING GUIDE

Company name:	Customer reference:
---------------	---------------------

i INFO

To allow us to deliver to you with maximum efficiency, please fill in this questionnaire carefully. We decline all liability in the event of the required delivery location being inaccessible due to the indications you have provided. Any new deliveries will be invoiced to you. Thank you for your understanding.



ORDERED EQUIPMENT

Automatic slatted cover
 Bar cover
 Bubble cover (over 4.50 m)
 Pool kits solutions/above-ground pools

ROAD SIGNAGE LEADING TO THE REQUESTED DELIVERY POINT

Have you already seen this type of road sign on the road that leads to the requested delivery point?

Yes If so, please indicate which ones:
 No

ACCESS TO THE REQUESTED DELIVERY POINT: TYPES OF VEHICLE LIKELY TO HAVE ACCESS

Below are different vehicle types. Indicate which types are likely to be able to pass in front of the requested delivery location.

 Tractor + trailer (38 tonnes): <input type="checkbox"/> Yes <input type="checkbox"/> No	 Semi-trailer (38 tonnes): <input type="checkbox"/> Yes <input type="checkbox"/> No	 Small carrier (19 tonnes): <input type="checkbox"/> Yes <input type="checkbox"/> No	 Small truck (<6 tonnes): <input type="checkbox"/> Yes <input type="checkbox"/> No
 Garbage trucks: <input type="checkbox"/> Yes <input type="checkbox"/> No	 Concrete mixer trucks: <input type="checkbox"/> Yes <input type="checkbox"/> No	 Fuel delivery trucks: <input type="checkbox"/> Yes <input type="checkbox"/> No	 Small van: <input type="checkbox"/> Yes <input type="checkbox"/> No

TRUCK CLEARANCES: DETAILS

Be careful of the truck clearance: Is the delivery address subject to one of the below situations ?

 Electric cables: <input type="checkbox"/> Yes <input type="checkbox"/> No	 Low branches: <input type="checkbox"/> Yes <input type="checkbox"/> No	 Corners of roads: <input type="checkbox"/> Yes <input type="checkbox"/> No
---	--	--

OTHER INDICATIONS, PLEASE DESCRIBE

IVERNEA & IVERNEA PLUS WINTER PROTECTION COVERS

Customer N°:	Customer reference:	Order form date:
--------------	---------------------	------------------

Company contact details: Surname: Postcode: City: Country : Phone: E-mail: Contact in case of missing measurements:	Delivery address: Name: Address: Postcode: City: Country..... Phone (person to contact) Access: <input type="checkbox"/> Semi-trailer <input type="checkbox"/> Carrier Other: <input type="checkbox"/> Pick up at DEL Brécé factory (35530 Brécé, FRANCE)
--	---

New pool Existing pool: to avoid re-taking the measurements, please indicate the invoice n°, order n° or delivery document n° for the original cover:

Caution, Ivernea and Ivernea Plus covers are not compatible with a solar PVC slat cover.

SLATS

In-ground (decking above water)
 In-ground (decking under water)
 Above-ground (without covering)
 Above-ground (with covering)

MODEL / COLOUR


Ivernea:
 Green Blue Beige Grey

Ivernea plus:
 Ivernea Plus

POOL DIMENSIONS
 (for in-ground covers, indicate the size excluding the pit)

Length: cm
 Width: cm

Diagonals
 Diagonal AC = cm
 Diagonal BD = cm



Diagonals taken at sharp corners.

CORNER RADIUS

A = cm
 B = cm
 C = cm
 D = cm

STAIRS

Yes No

SHAPE:
 Square Roman

Indicate the stair position:
 On the AB width On the CD width
 Along the AD length Along the BC length

FILTRATION BLOCK / CUT

Yes (supply a drawing) No

FITTINGS

Bungee-clip

OPTION

Additional bungee clip(s): quantity: recommended for windy regions.
 Additional anchors for windy regions: quantity:

