SLATS ONLY (FOR IN-GROUND AND ABOVE-GROUND COVERS)

SPEEDY Slatted Cover		ication required:] No	FROM NOVEMBER TO MAR D+5	RCH APRIL D+6	FROM MAY TO AUGUST D+7	SEPTEMBER, OCTOBER D+6
Customer N°:		Customer reference	:	Order for	m date:	
Company contact d Surname:	City:	urements:	Delivery address: Name: Address: Postcode: Country: Access: Semi-trai Fill in the truck acces Pick up at DEL Bré taking again measure	ler Ca ss checking ecé factory	rrier Other:g guide on the folk y (35530 Brécé, FRA	owing pages ANCE)
SLATS		number, order nu	mber or reference of t	he origina	ll cover made:	
SLATS Opaque PVC 84 slats Choose PVC opaque 69 slats for pool widths of 5.05m or more. White Grey Solar polycarbonate slats - 69 mm (not compatible with bromine treatment) Crystal black Silver Absolute black Crystal blue* Crystal* Crystal brown* Crystal green* Leave one slat out of three without end cap to ease the sliding of the slats: \ AD side BC side By default, all endcaps will be installed. Opaque PVC 69 slats Blue* Crystal blue* BC side White Beige Grey Blue* Additional lead time for slats over 6 m long. *Additional lead time. STAIRS OR SLAT CUT-OUT Roman stair Square stair Trapezoid stair Slat cut-out (attach a plan) LOCKING KITS Pushlock Mite Beige Grey Dark grey Blue Argile green Guicklock + Tool (only for opaque PVC 69 and solar polycarbonate slats): Hanging mount Hanging mount High hanging mount (Pushlock only) White Staplock kit (only for opaque PVC 69 and solar polycarbonate slats): INFO Only the Pushlock kit is compatible with the Rollinside automatic cover						
CURRENT AUTOMATIC	COVER					
In-ground: Rollinside: 1 side Rollenergy Evolution Above-ground: Tixit Moon Other: WINTER SHIFT / PROT	Contura	- Total pool depth Rollin Rollover	istance (on 1 side):		cm	
	Fill in the order	form on the following	<u> </u>			




Customer N°:	Customer reference:	Order form o	late:	Company:		
POOL TYPE		INTERIOR P	POOL DIMENSIONS E WATERTIGHTNI	BE TAKEN AT THE ESS HAS BEEN M		LINE AFTER
Polyester shell - Brand: - Model: - Concrete Resir		Skimmers on the	Proud ofc e widths indicate th	em on the drawi	ing	
WATERTIGHTNESS			-			
Liner* Tiles Other: * For a sharp radius liner, a on your slats. POOL	On-site lining Coated radius of 5 cm will be made	SIDE (nmer	skimmer		- Skimmer positions
Diagonals Diagonal AC = Diagonal BD =		cm		cm	cm	Position of the locking kits tho have already been installed
Yes (by default 1 ever on AB BC (CD () AD	cm	PIT / REEL SYST	cm	cm	Position of the locking kits tho have already been installed
Infinity control box (w Pushlock hanging mo	ount kits)	←→	. cm cm	skimmer cm	cm	- Skimmer positions
Indicate the position already been installed. To comply with the French the locking kits must be in recommendations in the to the positioning of the lock of Grapup according to the detailed will be sent to you be to the cover (mechanics, slats, mot group. If this is not the case, certificate. Limits of use: DEL covers for compliant if the pool is equi device for automatically low 2 cm when the cover is close At present, DEL covers with a not compliant with standard	as of the locking kits that have ed. INF P90-308 safety standard, stalled in accordance with our echnical instructions leaflet. King kits will be determined by econfiguration of your pool. At when your cover is delivered. All NF P90-308 standards, that lements making up this safety corization) must come from CF we will not be able to issue this proverflow pools can only be ipped with an Infinity box-type ering the water level by at least ed. A INF P90-308. Tacturer specifies otherwise,	Sharr A	dius: cm	cm	of t wal	
		A	Pit width at axlo		В	—



Customer N*:	Customer reference:	Order form date:		Company:		
POOL TYPE				BE TAKEN AT THE WA		ΓER
Polyester shell - Brand: Model: Concrete Resin	Wood	Skimmer thickness	d ofcı	m em on the drawing		
Polystyrene block WATERTIGHTNESS	☐ Metal	Stairs (see on the foll	owing pages)			
Liner* Tiles Other: * For a sharp radius liner, a radion your slats.			POSITE THE R	skimmer cm	Skimmer positions	
POOL Diagonals Diagonal AC =	cm	←→	cm	cm cm	Position of locking kit have alred been insta	ts the
Diagonal BD =	cm	R	EEL SYSTEM	SIDE		
Overflow Yes (by default 1 every 4 on AB BC C No Infinity control box (we repushlock hanging mounts)	CD AD	A skimmer	cm	skimmer cm	Position of locking kit have alred been insta	ts tho ady alled
For an overflow pool, the han delivered in raw stainless-ster	ging mount kits will be	D		cm C		
skimmer : Indicate the exact already been installed. To comply with the French NF the locking kits must be installed recommendations in the tech. The positioning of the locking CF group according to the codetailed plan will be sent the delivered.	of the locking kits that have F P90-308 safety standard, elled in accordance with our nical instructions leaflet. It is will be determined by onfiguration of your pool. A polyou when your cover is	Radius: Sharp		ius: cm Sharp		
Limits of use: To comply with all it is essential that all the elem cover (mechanics, slats, motori: group. If this is not the case, we certificate. Limits of use: DEL covers for compliant if the pool is equipp device for automatically lowerir 2 cm when the cover is closed. At present, DEL covers with a re not compliant with standard NI Unless the alarm manufacimmersion alarms are not comp	nents making up this safety cation) must come from CF will not be able to issue this overflow pools can only be ed with an Infinity box-type go the water level by at least emovable form on a side are F P90-308.	A	cm	us: cm Sharp \Box B		




Customer N°: Customer reference: Order form date: Company:

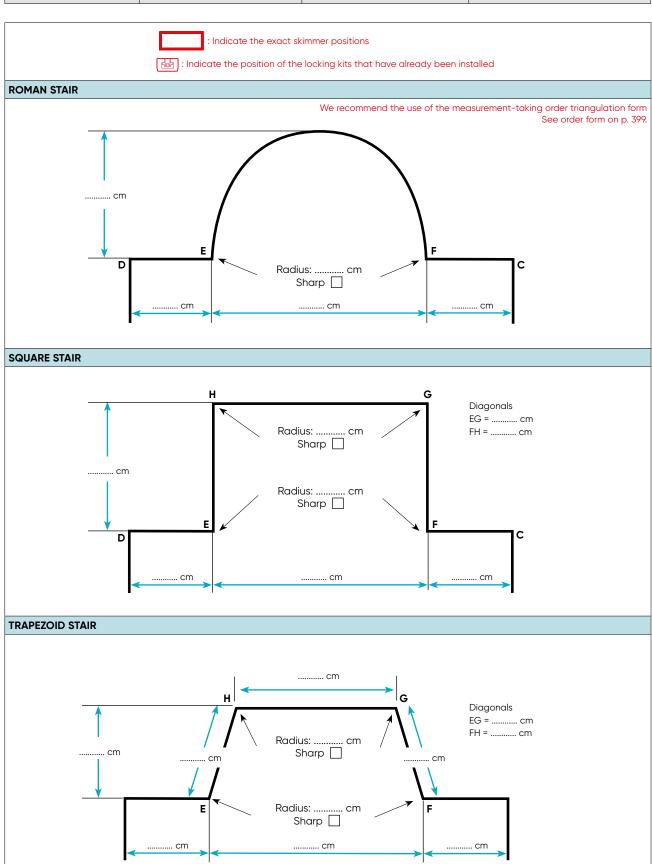



Customer N°:	Customer reference:	Order form date:	Company:

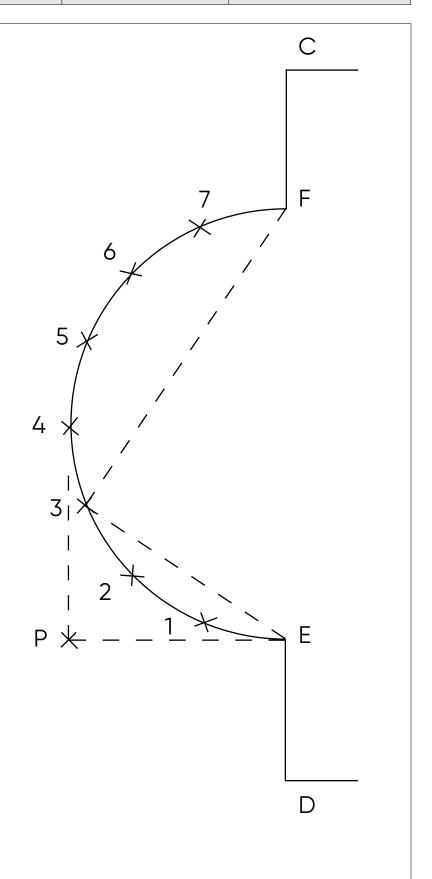

_
\
Z-11/
44111

Customer N°:	Customer reference	:	Order form date:	
Company contact details: Surname: Postcode: Country: Phone: E-mail: Contact in case of missing measure New pool Existing po	rements:ol: to avoid re-taking order n° or delive	Address:	ntact)écé factory (35530 Bré	
SLATS				
☐ In-ground (decking above water) ☐	In-ground (decking unde	er water) 🗌 Above-grou	nd (without covering)	Above-ground (with covering)
MODEL / COLOUR			cm	
Ivernea: Ivernea plus □ Beige □ Grey □ Ivernea P		↑D		- 4
POOL DIMENSIONS (for in-ground covers, indicate the size excl Length:	the coping	 cm		cm
Yes \q	_	↓ A		B ↓
SHAPE: Square Roman Indicate the stair position: On the AB width On the Cl Along the AD length Along the FILTRATION BLOCK / CUT		↑ H	cm	F
Yes (supply a drawing) No		cm	cm	cm
FITTINGS			CIII	CIII
Bungee-clip OPTION		<u> </u>		
Additional bungee clip(s): quantity recommended for windy regions. Additional anchors for windy region		cm E	F	
		cm	cm	cm

Company name:	Customer reference:

1 INFO

To allow us to deliver to you with maximum efficiency, please fill in this questionnaire carefully. We decline all liability in the event of the required delivery location being inaccessible due to the indications you have provided. Any new deliveries will be invoiced to you. Thank you for your understanding.



provided. Any new deliveries will be inv	, , ,	J .	nOnnOr
ORDERED EQUIPMENT			
☐ Automatic slatted cover ☐ Bar	cover Bubble cover (c	ver 4.50 m)	
ROAD SIGNAGE LEADING TO THE REQ	UESTED DELIVERY POINT		
Have you already seen this ty that leads to the requested d			
Yes If so, please indicate which ones	:		
ACCESS TO THE REQUESTED DELIVERY	POINT: TYPES OF VEHICLE LI	KELY TO HAVE ACCESS	
Below are different vehicle types. Indica	ate which types are likely to be	e able to pass in front of the red	quested delivery location.
000000000	0 00 00		
Tractor + trailer (38 tonnes):	Semi-trailer (38 tonnes):	Small carrier (19 tonnes):	Small truck (<6 tonnes):
☐ Yes ☐ No	Yes No	Yes No	Yes No
Garbage trucks:	Concrete mixer trucks:	Fuel delivery trucks:	Small van:
TRUCK CLEARANCES: DETAILS			
Be careful of the truck clearance: Is the	delivery address subject to a	ne of the below situations?	
Electric cables: Yes No	Low branches: Yes	No Corners of	roads: 🗌 Yes 💮 No
OTHER INDICATIONS, PLEASE DESCRIB	Е		