

FILTRATION PUMP



CF WATERCOOLING PUMP

Premium energy efficient variable speed pump

CF 
TRUST THE POOL EXPERTS

FILTRATION PUMP

CF WATERCOOLING PUMP



Ideal for pool filtration, in-floor pool cleaning systems, connection to external pool controllers, heat pumps and gas heaters.

Bluetooth smartphone control via iOS or Android app


Weatherproof RJ45 communication port for communication & connecting to external pool control systems or pool heaters

Multi-coloured LED indicator light for operating conditions and warnings

Fully variable frequency drive with user friendly selectable speed dial

Loss of prime protection to protect the pump when there is no water inside the pump

Extra-large 4.5 litre lint pot provides longer intervals between cleaning

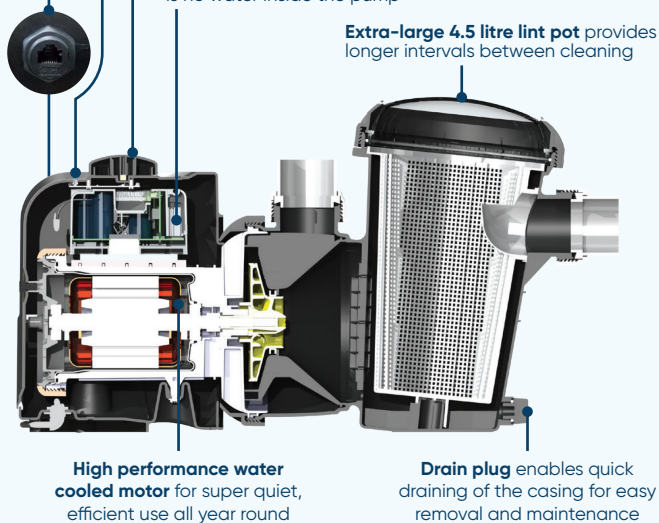

High performance water cooled motor for super quiet, efficient use all year round

Drain plug enables quick draining of the casing for easy removal and maintenance

+ produits

- **Bluetooth enabled** - To allow set and control filtration and speed cycles from your iOS or Android smartphone.
- **Ability to cap peak flow, priming and backwash speeds** - Ideal for retrofit installations with sand filters.
- **Super quiet** - Designed with a unique water cooled motor which captures noise and vibrations, allowing super quiet operation, rated down to 50dBa. Your neighbours won't even know it's there.
- **Weatherproof RJ45 communication port** - Speed adjustment by external pool controller, pool cover or heat pump.
- **Backwash speed cycling technology** - For effective media cleaning and reducing waste water when backwashing
- **Loss of prime protection** - Minimises damage if the pump runs dry.
- **Convenient** - Extra-large 4.5 litre leaf basket - less cleaning required.


ELECTRICAL DATA

Voltage (V)	220 - 240
Supply frequency (Hz)	50/60
Maximum input power (W/hp)	125W/0.17hp @ Dial 1 724W/0.97hp @ Dial 5 1,557W/2.08hp @ Dial 10 Backwash: varies
Motor speed (rpm)	1,050 to 3,100
Standby power (W)	✓
Backwash (rpm)	Variable speed
Enclosure class (IP)	45
Insulation Class	F
Power lead length	3m
Approval No.	SGS-180275-EA

OPERATING LIMITS

Max Water Temperature	40°C
Max Ambient Temperature	50°C
Sound Pressure Level	50 dBa*
Sound Power Level	71 dBa**

PERFORMANCE CURVES

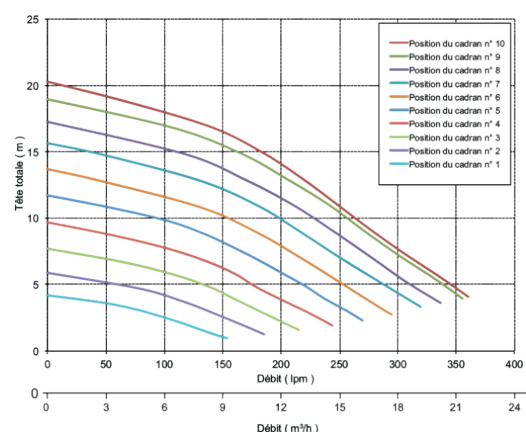

USEFUL TO KNOW

Product dimensions 67 x 25 x 38 cm
 Mounting holes diameter : 10 mm
 Inlet & Outlet : 50/63
 Net Weight : 14,50 kg

cf-poolproducts.com

a brand by CF group