

AquaRite® CF+ by Hayward®

YEARS OF WARRANTY

3 STANDARD 8000 HOURS

Cell
MADE IN EU

A SALT CHLORINATOR FOR YOUR SWIMMING POOL

NEW

- **New design of control box** to disinfect, control and regulate all your pool
- **Clean water at all times:** save on chemicals and take advantages of low salt consumption: lower chlorine level, less chloramines smell, less oxydation of metal equipments
- **Control and regulation** of pH, redox and free chlorine
- Control of filtration, lighting (up to 50W)
- **Control all your pool remotely** with Wi-Fi/Ethernet (optional)



INCLUDED



OPTIONS AVAILABLE

Description	LOW SALINITY						
	AQR-CF-PLUS-16	AQR-CF-PLUS-22	AQR-CF-PLUS-33	AQR-CF-PLUS-50	AQR-CF-PLUS-1LS	AQR-CF-PLUS-2LS	AQR-CF-PLUS-3LS
Standard pH probe kit	BKPER-OPTION-PH						
Redox probe kit as standard	E-OPTION-REDOX						
pH / redox glass probe kit	BGEGKBPER						
pH / redox Goldline probe kit	BUEUKBPER						
Temperature sensor	T-OPTION-TEMP						
Free chlorine amperometric probe	H-OPTION-CL						
Free chlorine membrane probe	H-OPTION-CL2						
WiFi module	RS3WI-OPTION-W						
Ethernet module	RS3NET-OPTION-L						
Detachable touch screen	CTS-OPTION-TS						
Detachable TFT screen	AQR-PLUS-PANL						
Acid tank detection	AQR-PLUS-CANNE						




pH kit as standard



Redox probe kit as standard



Temperature kit



Free amperometric probe



Free chlorine membrane probe



WiFi module




Ethernet module



Detachable touch screen



Detachable TFT screen



Flow switch included


AquaRite® CF+ by Hayward®

YEARS OF WARRANTY

3 STANDARD 8000 HOURS

Cell

MADE IN EU



AQUARITE® CF+


Description	AQR-CF-PLUS-16	AQR-CF-PLUS-22	AQR-CF-PLUS-33	AQR-CF-PLUS-50	AQR-CF-PLUS-1LS	AQR-CF-PLUS-2LS	AQR-CF-PLUS-3LS
Maximum production CL ₂ /h	16 gr	22 gr	33 gr	50 gr	0-100%		
Salt concentration	From 3 g up to 100g of NaCl				From 1,5g up to 100g of NaCl		
Choice of languages	EN - FR - ES - DE - IT - CS - PT - NL - PL - HU - RO - HR - HE - ZH						
Pool volume	75 m³	100 m³	150 m³	200 m³	60 m³	120 m³	150 m³
Display	4,3" touch screen						
Power supply	220 V; 50/60 Hz						
Dimensions	270 x 220 x 115 mm						
Electronic box	Black ABS fireproof plastic						
Protective lid	Blue ABS fireproof plastic						
Output	8-15 A	10-15 A	10-15 A	35-45A	8-15 A	10-15 A	35-45 A
Consumption	120 W	150 W	150 W	360 W	120 W	150 W	360 W
Main control outputs	Filtration / lighting (12VAC 50W) / heating						
Additional control outputs	4 additional auxiliary relays, configurable by the user						
Self-cleaning	By polarity inversion						
Salinity test	Measures salt concentration (g/L) (precision ±10%)						
Detection of closed pool cover	Production level can be configured in the range 0 to 100%						
Flow detection	Gas sensor + mechanical flow switch			Mechanical flow switch	Gas sensor + mechanical flow switch		Mechanical flow switch



TRANSPARENT CELL

Description	AQR-CF-PLUS-16	AQR-CF-PLUS-22	AQR-CF-PLUS-33	AQR-CF-PLUS-50	AQR-CF-PLUS-1LS	AQR-CF-PLUS-2LS	AQR-CF-PLUS-3LS
Salt chlorination cell	4 monopolar titanium plates	5 monopolar titanium plates	7 monopolar titanium plates	10 monopolar titanium plates	5 monopolar titanium plates	7 monopolar titanium plates	10 monopolar titanium plates
Minimum flow rate	5 m³/h	7 m³/h	9 m³/h	9 m³/h	5 m³/h	9 m³/h	9 m³/h
Plate dimensions	200 x 45 mm	200 x 45 mm	400 x 45 mm	400 x 45 mm	200 x 45 mm	400 x 45 mm	400 x 45 mm
Cell mount material	Transparent PVC plastic						
Cell attachment	Threaded for easy cell mounting						
Flexible piping diameter	63 mm						
Cell dimensions	355 x 305 x 305 mm						
Cell cable	(3 x 4) x 1.5 m						
Maximum pressure	4 kg/cm²						
Maximum temperature	45 °C						

CONNECTIVITY

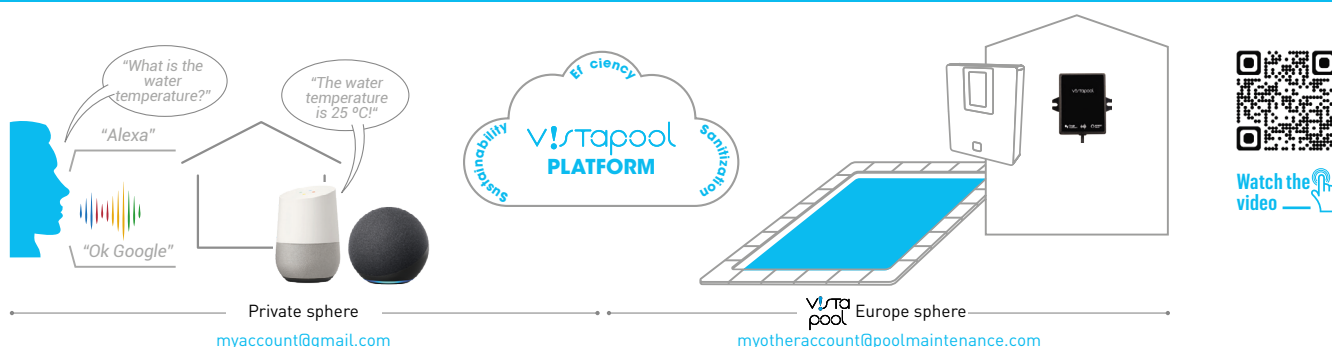

Control all your pool equipment with **Alexa** and **Google Assistant***