

SLATS

OPAQUE PVC 84 SLATS



The standard slats with a unique, modern and sleek design

SLATS


OPAQUE PVC 84 SLATS

+ MODERN AND SLEEK

- A new and unique design on the market. The black flexible joints and caps bring contrast with the color of the slats.
- The boat deck-like flexible joints make cleaning between the slats easy.
- The flat slats look perfect on the water.
- Registered and patented model.


+ MATERIAL

- Extruded PVC slats without lead-based additive.
- The slats are UV-protected and have a good resistance to stains and organic deposits.
- Material compliant with age resistance requirements defined by french standard NF T54-405-1: 2013.

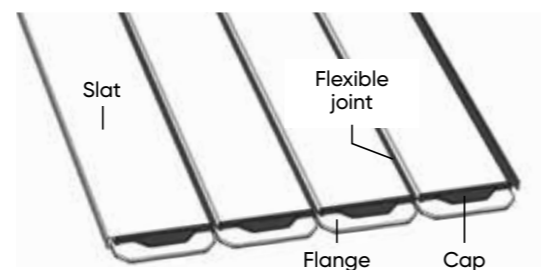

+ CAPS AND FLANGES

- The black caps are welded for a perfect watertightness.
- Standard flange size is 2.50 cm. S size flanges (-1 cm) and XL size flanges (+1 cm) are also available to adjust the dimension of the slats if necessary.
- For a more optimal and qualitative appearance of your slats, our radius-end caps can be adjusted to the radius of your pool or staircase.

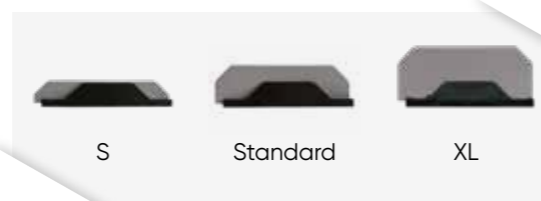

Slat colours



All our slats are compliant with the NF P90-308 french standard*.




Flexible joints and caps are black.
Flange's colour is the same as the slats.

*To comply with the French safety standard NF P90-308, the slats must have a minimum width of 2.50 m.


USEFUL TO KNOW

The opaque PVC 84 slats are available for:


- All automatic slatted covers
- Pools wide up to 5.00 m
- Pushlock locking system only
- Pools with radius
- Pools with cut-out or stairs
- Pools with overflow or mirror




5 cm radius




10 cm radius



15 cm radius



20 cm radius



Pool with cut-out or stairs



Pool with overflow or mirror

Why cover your pool?

- To reduce the water consumption by limiting evaporation.
- To save energy.
- To make cleaning easier & reduce the use of chemical products.

▶ DON'T FORGET

The Pushlock locking kits of your cover ensure the safety of your pool.





Read carefully and keep for future reference.

The slats are parts of the slatted cover designed to prevent children under 5 years of age from accessing the pool. This product complies with the French safety NF P90-308 standard. It is no substitute for common sense or individual responsibility. It is not intended either to be a substitute for parental and/or adult supervision, which is the essential factor for the protection of young children. A child can get drowned within less than 3 minutes; no type of protection will ever replace the vigilance and supervision of responsible adults.

Warranty: 3 year for opaque PVC 84 slats in accordance with our general sales terms.

Order form: to have slats correctly adjusted to the pool, it is essential to provide a drawing of the pool with measurements taken every 1 meter. In accordance with the French safety NF P90-308 standard, the gap between the inside of the pool and the edge of the cover must be less than 70 mm.

Time needed to close a pool measuring 5.00 x 10.00 m: 3 minutes for automatic opening or closing and 30 seconds for locking or unlocking the safety kits. Slats can be opened or closed by one person.

Use: for all seasons. For a proper functioning, maintain a constant water level corresponding to a normal filtration of the pool. It is essential to have a water level regulator. The water level has to comply with the technical notice.

Use limits: DEL automatic slatted covers on overflowing pools can only be compliant if the pool is fitted with a device such as the Infinity control box that automatically lowers the water level by at least 2 cm when the cover is closed on the pool. To date, DEL automatic slatted covers with a removable form on a side staircase do not comply with French standard NF P90-308. Unless otherwise specified by the manufacturer, immersion alarms are not compatible with DEL automatic slatted covers.

Wintering: the swimming pool must be wintered on the basis of its geographical location. Without lowering the water level, close the cover to its safety position and where applicable install a wintering shift to protect the cover. If the water level is lowered so that the wall units are above the waterline, roll the cover in and secure the pool using a winter safety cover.

Packing list: for a swimming pool measuring 5.00 x 10.00 m. Slats: 4 packages: 5.10 x 0.39 x 0.11 m - 190 kg.

Manufacturer: DEL SAS - ZA La Croix Rouge - 35530 Brécé - FRANCE
www.del-piscine.fr/en



DON'T FORGET

Protect your slats from
UVs and dirt

with the Ivernea winter shift
or the Ivernea Plus 4-season
protective shift.

FOR MORE INFORMATION PLEASE ASK YOUR POOL EXPERT

DEL SAS with a capital of 2 300 000 € - RCS 303355671 Rennes - ZA La Croix Rouge - 35530 Brécé - FRANCE - Printed by Micro Lynx - 35000 Rennes - Non-binding document - © DEL SAS - 01/24 - Do not throw away - A-DBR012001L1

