

IN-GROUND AUTOMATIC SLATTED COVER

ROLLINSIDE



**The most discreet in-ground automatic slatted cover
that adapts to any configuration**

DEL

IN-GROUND AUTOMATIC SLATTED COVER ROLLINSIDE


+ ADAPTABLE

- Numerous possible configurations thanks to:
 - its integration under a decking (1st step, bench...).
 - a choice of position for the motor (outside the pool or integrated in the roller tube).



+ DISCREET

- Perfect integration into the pool without any loss of swimming space (the cover is at the bottom of the pool underneath the masonry).
- Turns into a sunbath or bench thanks to the decking in the water covering the system (the cover being built into the 1st step).
- The decking colours can be matched with the cover's components (slats and locking kits).

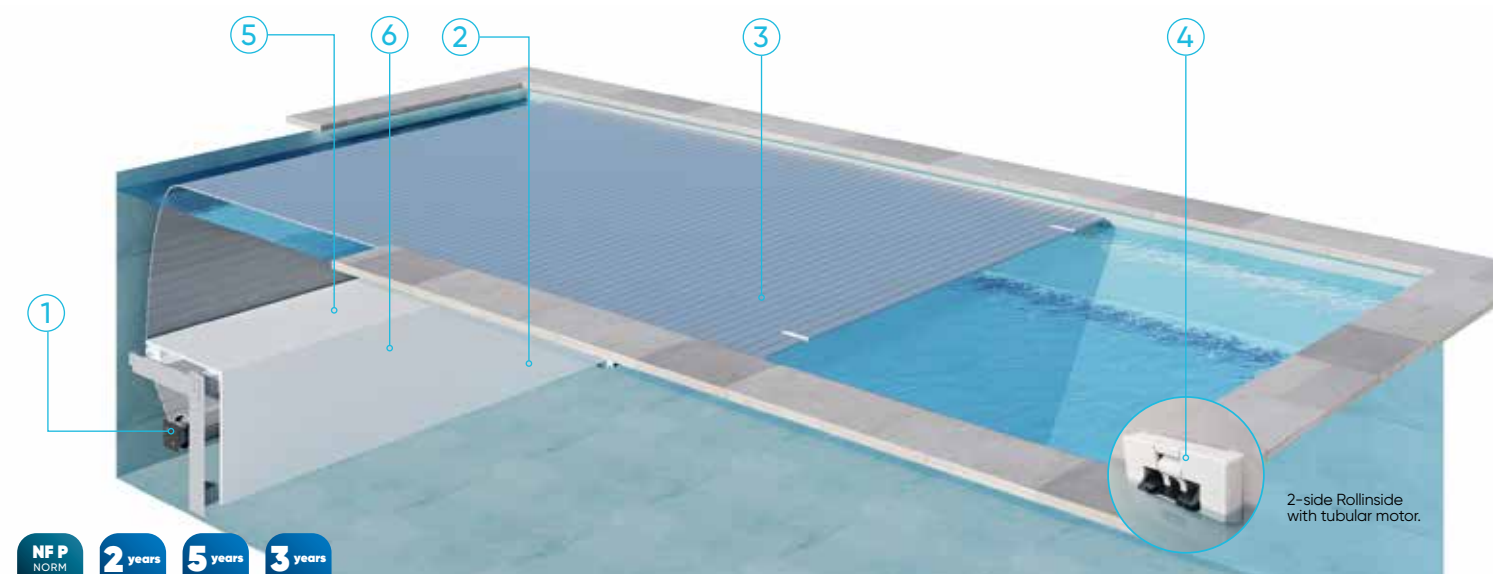

Cover available for pools up to 10.00 m wide (1 face model) or 6.00 m wide (2-side model).

1 MOTORISATION

- 3 motorisations and fixings available:
 - Motor in a dry pit - insert mount fixing.
 - Tubular motor - surface mount fixing.
 - Tubular motor - insert mount fixing.

Controlled by Wi-Key, key switch or LivePool.

2 FINISH

- PVC decking.
- PVC decking to be covered.
- Aluminium decking to be tiled.

3 SLATS

- Opaque 84 PVC slats, solar polycarbonate slats or opaque 69 PVC slats.

4 LOCKING KITS

5 ALUMINIUM TUBE

6 ANODISED ALUMINIUM BEAM

7 STOP FLOW

- Control of the filtration of the cover. It allows to stop the filter pump when the automatic cover motor is working.

Why cover your pool?

- To reduce the water consumption by limiting the evaporation.
- To reduce the energy consumption.
- To make the cleaning easier & to reduce the use of chemical products.

Your slats choice

All our slats have a quality finish and are compliant with the NF P90-308 standard.

Opaque PVC 84 slats



White



Grey

Opaque PVC 69 slats



White



Beige



Grey



Blue

Solar polycarbonate slats



Absolute black



Crystal black



Crystal blue



Crystal brown



Silver



Crystal



Crystal green

USEFUL TO KNOW

Choose solar polycarbonate slats to heat your pool water.



Read carefully and keep for future reference.

Rollinside is a safety cover for swimming pools, designed to keep children under the age of 5 out of the pool. This product is compliant with standard NF P90-308 if installed with the recommended safety locking kits. It is not a substitute for common sense or personal responsibility. It is no substitute for the vigilance of parents and/or responsible adults, which remains the essential factor for the safety of young children. A child can drown in less than 3 minutes; no type of preventive measures can replace the monitoring and vigilance of a responsible adult.

Warranty: 5 years' warranty on the tubular motor and 3 years' warranty on the dry pit motor. 3 years' warranty on opaque PVC 84 slats and opaque PVC 69 slats and 5 years' warranty on the solar polycarbonate slats. The roller is warranted for 2 years, in accordance with our general terms of sale.

Order form: for the cover to be properly adjusted to the swimming pool, it is essential to provide a drawing of the pool measured metre by metre. As specified by standard NF P90-308, the gap between the inner side of the pool and the edge of the cover must be less than 70 mm.

Time needed to close a pool measuring 5.00 x 10.00 m: 3 minutes to automatic opening or closing and 30 seconds for locking or unlocking the safety kits. The Rollinside can be opened or closed by one person.

Use: all year round. To keep your cover in good working conditions, maintain a constant water level that matches the normal filtration rate of the swimming pool. The use of a water level regulator is essential. It must comply with the instruction manual.

Limits of use: DEL automatic slatted covers on overflowing pools can only be compliant if the pool is fitted with a device such as the Infinity control box that automatically lowers the water level by at least 2 cm when the cover is closed on the pool. To date, DEL automatic slatted covers with a removable form on a side staircase do not comply with French standard NF P90-308. Unless otherwise specified by the manufacturer, immersion alarms are not compatible with DEL automatic slatted covers.

Wintering: the swimming pool must be wintered on the basis of its geographical location. Without lowering the water level, close the cover to its safety position and where applicable install a wintering net to protect the cover. If the water level is lowered so that the wall units are above the waterline, roll the cover in and secure the pool using a winter safety cover.

Packing list for a 2-face cover: for a swimming pool measuring 5 x 10 m. Opaque PVC 84 slats: 4 packages of 5.10 x 0.39 x 0.11 m - 190 kg. / Solar polycarbonate slats and opaque PVC 69 slats: 5 packages of 5.10 x 0.25 x 0.20 m - 250 kg / Tube: 1 package of 5.02 x 0.15 x 0.15 m - 37 kg / Beam: 2 packages of 5.02 x 0.15 x 0.15 m - 58 kg / Decking: 1 pallet of 1.20 x 1.00 x 0.50 m - 44 kg / Motorisation kit + locking kit: 1 package of 0.80 x 0.60 x 0.50 m - 41 kg / Mechanical wall unit: 1 package of 0.30 x 0.20 x 0.20 m - 5 kg / Beam support wall unit: 1 package of 1.00 x 0.20 x 0.20 m - 10 kg / Total weight: 395 - 405 kg.

Manufacturer: DEL SAS - ZA La Croix Rouge - 35530 Brécé - FRANCE
www.del-piscine.fr/en



LIVEPOOL



Opening and closing
of the automatic cover
with a smartphone thanks to the
free LivePool App.



DON'T FORGET

Protect your slats from
UVs and dirt

with the Ivernea winter shift
or the Ivernea Plus 4-season
protective shift.

FOR MORE INFORMATION PLEASE ASK YOUR POOL EXPERT

DEL SAS with a capital of 2 300 000 € - RCS 303355671 Rennes - ZA
La Croix Rouge - 35530 Brécé - FRANCE - Non-binding document -
© DEL SAS, ANTEALE Photographie, Studio S20 - 01/24 - Do not throw
away - A-DBRO12103.L1

