

EN



# INSTALLATION GUIDELINES

INSTALLATION/SERVICING/MAINTENANCE/SAFETY ADVICE



**DEL** 

**4-SEASON SAFETY COVER**

ÉQUINOX AZTECK E-1.0

---

# CONTENTS




## **PLEASE READ THESE INSTRUCTIONS CAREFULLY AND KEEP THEM FOR FUTURE REFERENCE**

Please read this manual carefully to help you understand all of the information and to ensure safe installation, use and servicing. We are not held liable for any damage arising due to a failure to respect the instructions set out in this manual.


DESCRIPTION.....	p. 4-5
Components supplied.....	p. 4
Tools required for assembly.....	p. 5
Packing .....	p. 5
Assembly .....	p. 5
Transport .....	p. 5
INFORMATION.....	p. 6
Prerequisites .....	p. 6
INSTALLATION.....	p. 7-13
Installing the cover .....	p. 7
Marking out the corners and the anchor line for the anchor bolts .....	p. 8
Pitons / Anchoring.....	p. 9
Closing the pool.....	p. 13
Pool opening .....	p. 13
MAINTENANCE / SERVICING.....	p. 14-17
Basin water level.....	p. 14
Water filtration and treatment .....	p. 14
Maintenance (at customer's expense) .....	p. 15
Maintenance .....	p. 16
Wintering.....	p. 17
Spare parts .....	p. 17
SAFETY TIPS AND STANDARDS .....	p. 18-19
RECYCLING .....	p. 20
REGULATIONS.....	p. 21
WARRANTY CONDITION.....	p. 21

# DESCRIPTION

## COMPONENTS PROVIDED



mast + crank + winding strap + bungee cords

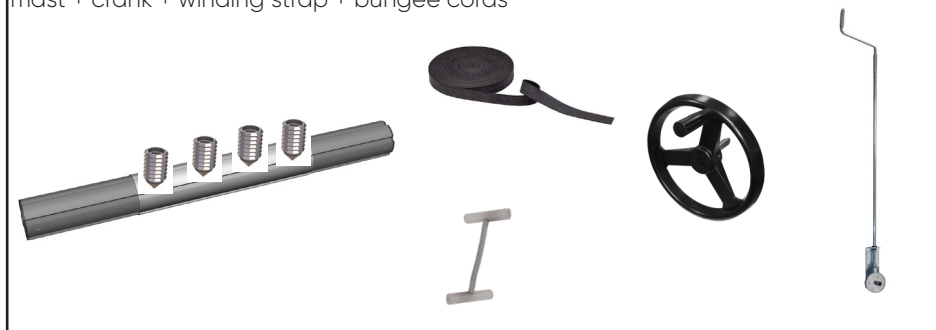

## DESCRIPTION

### TOOLS REQUIRED FOR ASSEMBLY



	Meter
	Allen key n°3
	Key n°8
	Cutter
	Decameter

### PACKING LIST



1 package  
Package size : 0.80 x 0.60 x 0.40 m  
Weight in kg : 30 to 50 Kg.



Optional: roll-up pole + valance  
Package size : 2.50 x 0.30 x 0.30 m  
Weight in kg : 15Kg

### ASSEMBLY



2 persons



1 hour





### TRANSPORT



The equipment travels at the recipient's risk. On receipt of the goods, if the recipient notices any damage caused during transport, he must immediately make reservations on the carrier's delivery note. These must be confirmed within 48 hours by registered letter to the carrier.

## INFORMATION

### TO ENSURE THAT YOUR ROOF COMPLIES WITH THE NF P90-308 STANDARD

	<p>The water level must be maintained at its normal level at all times.</p> 
	<p>The pool must be fitted with a water level regulator.</p>
	<p>The drainage pump must be installed on the cover in case of rain.</p>



 **WE ADVISE YOU TO READ ALL THE INSTALLATION STEPS BEFORE INSTALLING THE SYSTEM, TO AVOID UNNECESSARY HANDLING.**

# INSTALLATION

## INSTALLING THE COVER

1 - Place the cover across the width of the pool on the roll-up side (opposite the tensioning catch).

**CAUTION** : the tensioning pawl must be above the cover.





2 - Unfold the cover over the pool to give an even overhang on all 4 sides.

**CAUTION** : Do not stretch the cover; it should rest naturally on the water.



# INSTALLATION


3 - Tension the rope using the hooks

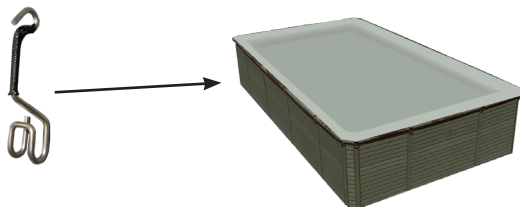

4 - When tensioning for the first time, adjust the rope size if necessary.  
Loosen the rope clamp.




Adjust the rope length, screw the rope clamp back on and retighten the locking knot.



# INSTALLATION

## WINDING MAST

Mast assembly

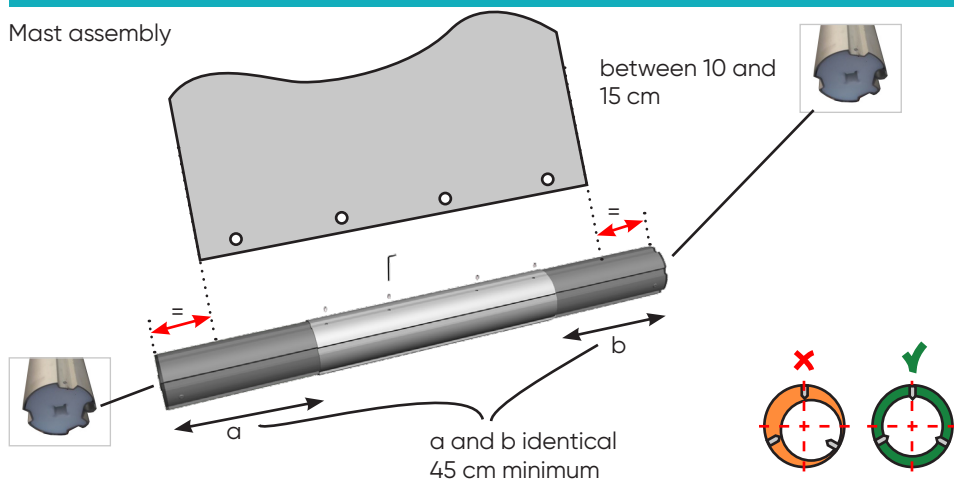


Installation of bungee cords and roll-up strap

The furling strap must be in the centre of the mast

Fit the end cap into the groove on the axle.

insert the end cap into the groove on the axle.

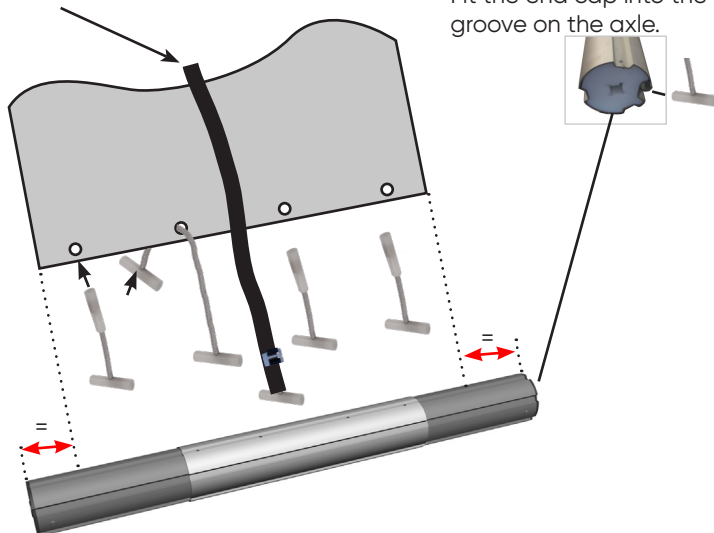





# APPLICATION

## POOL OPENING


1- Loosen the rope by moving the pawl to the "open" position.

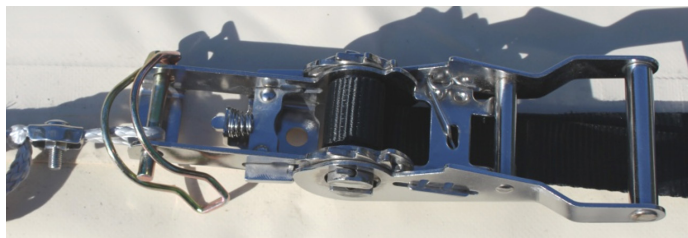


2- Remove the rope from all the hooks.



3- Position the roll-up strap in the centre of the cover

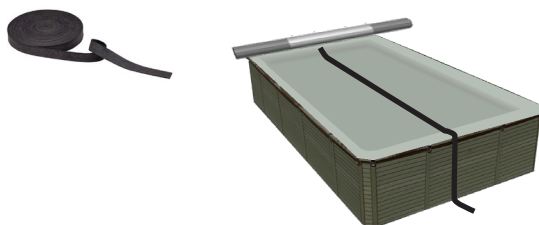

4- Roll up the blanket using the crank or steering wheel.

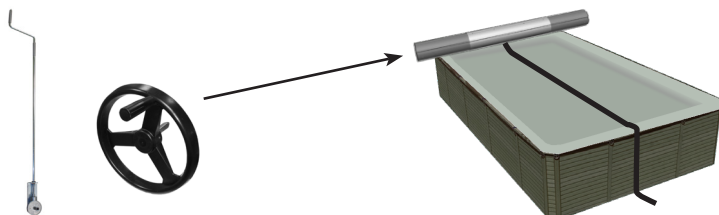

# APPLICATION

## POOL CLOSURE

The person carrying out the operation must ensure that there are no bathers in the pool and always have a view of the pool during the opening and closing operations.

It is imperative to open or close the cover completely, without ever leaving it in an intermediate position".


Always check that the water level in the pool remains constant and complies with the manufacturer's recommendations.

1 - Position the cover over the pool.



## APPLICATION


2 - Attach all the hooks to the canvas rope.

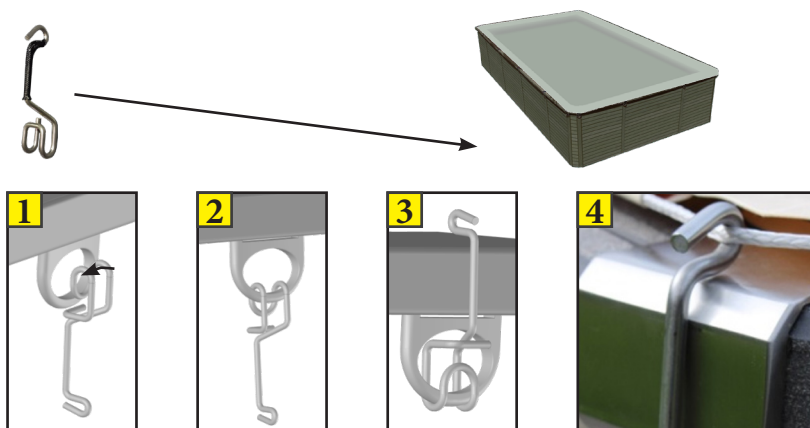

3 - Tighten with the ratchet.



4- Putting the drainage pump in place.



- For electrical safety reasons, the pump transformer must be at least 2 m from the pool and the mains plug at least 3.5 m (C15-100 electrical standard).

If necessary, the mains voltage section can be extended. To do this, use a watertight protective box for extension leads (not supplied,

available from all DIY stores).

- The drainage pump should be installed in the middle of the pool on the liner each time the pool is closed, so that rainwater can be continuously drained off if necessary.

It must be installed to comply with the requirements of standard NF P90-308.

- To be fitted with a frost-resistant Ø15mm garden hose (supplied by the customer) for draining the water + hose clamp.

- The pump ballast should be filled (water-sand-other) and placed on the pump.

- The pump switches on automatically if there is water (requires approximately 2-3 cm of water under the pump).

For more information, see the pump manual.

## SERVICING/MAINTENANCE



**During any intervention, the technician must wear PPE (personal protective equipment): gloves, goggles, mat, etc...**

### WATER LEVEL IN POOL

- In order to ensure maximum safety and correct operation of the rewinder, always check that the water level in the pool remains constant and complies with the manufacturer's requirements (for greater comfort, use an overflow and a water level regulator).
- A water level that is too high is due to the overflow being obstructed by leaves or other items.
- Recommended water level: between 7 cm and 15 cm below the top of the coping.

### WATER FILTRATION AND TREATMENT

- Programme filtration to take place at a time when the sun is shining on the pool and ensure that it is set to work all the time when the water reaches 25°C.
- In order to ensure that your installation will last, the water in the pool must be correctly treated in compliance with the applicable standards and recommendations (NF EN 16713-3).
- The pH, hardness and alkali levels of the water must be checked and adjusted as often as is necessary (although you will need to ensure that you don't correct these three parameters independently of each other but do so using the Taylor table and provide the water with balance with regard to the three parameters analysed).

## SERVICING/MAINTENANCE

### SERVICING (customer's responsibility)

- Carry out a deep clean of the cover twice per year (the first time in the year it is used and prior to Wintering). This is even more important if the water in the pool is limestone. In this case, use a descaling cleaning product (see catalogue) and rinse using a hose.
- Do not allow leaves to accumulate and decompose on the cover.
- Clean the cover regularly by removing it from the pool and placing it flat on a suitable surface (watch out for plants and sharp objects that could damage the cover). Rinse both sides of the cover under running water and, if necessary, clean the dirtiest areas with a non-abrasive sponge (soak the sponge in pool water line cleaner if necessary).
- Do not use abrasive products or solvents to clean the cover.
- It is best to inspect the entire system if the cover is forced to bear unexpected weight at any time (fall).
- Carry out an annual check of the straps.
- Metal components must be cleaned and lubricated regularly to ensure that their operation is not impaired, which could present a risk (foot injuries in the event of an impact or fall). In the event of damage, replace defective parts with original ones.

# SERVICING/MAINTENANCE

## MAINTENANCE (ONCE PER YEAR MINIMUM)

- All maintenance work must be carried out by a professional, who will contact the manufacturer if necessary (contact details at the back of this document).
- This product does not have any wear parts requiring replacement. However, if you notice that certain parts are deteriorating, please ensure that they are replaced.
- All spare parts must come from the manufacturer or comply with standard NF P90-308.
- Check that the installation is working correctly.
- Inspect the cover thoroughly.
- At the start of each season and in the event of an accident (a falling object, hail on the cover, abnormal stress on the cover, etc.), check that the cover has not suffered any visible damage likely to compromise its safety (cracks, holes, deformations, etc.). If necessary, replace parts or the entire roof.
- Check the state of the straps (seams) and in particular the wear on the anti-abrasion sleeve. If the latter is no longer fulfilling its role of protecting the strap against abrasions from the pool rim, then replace it.
- Customer service: contact details on back page of document.

## ▶ EACH TIME IT IS USED

- Carry out a visual check of the fastening and drive components.  
every 3 months

## ▶ EVERY 3 MONTHS

- Carry out a complete cleaning.

## ▶ EVERY 4 MONTHS AND AFTER ANY EXCEPTIONAL EVENT (FALL, HEAVY RAIN, STORM, SNOW, PARTICULAR IMPACT, ETC.)

- Carry out a thorough check of all the components of the cover (condition and assembly of fabric, seams, straps, ratchets, hooks, anti-abrasion pads, etc.).


## ▶ EVERY 3 YEARS

- 2-end and continuous bungee cords must be changed

## SERVICING/MAINTENANCE

### WINTERING

- Position the cover in the closed position and keep the water level constant in accordance with the manufacturer's recommendations.



- During the winter season, in the event of snowfall, it is essential to remove the snow from the cover using a brush with a telescopic handle to avoid deforming the crossbars.
- Switch off filtration.

### SPARE PARTS

Online catalog :



<https://www.my-cfgroup.fr/fr/pieces-detachees>

## SAFETY ADVICE

Please read the recommendations set out below with care.

### WARNING

**Swimming pools can represent a serious danger for your children. Drowning can happen very quickly.**

**Children who are close to a swimming pool need to be watched constantly and actively, even if they know how to swim.**

**Learn lifesaving skills.**

**The physical presence of an adult is absolutely essential whenever the pool is open.**



Memorise the telephone numbers for the emergency services and ensure that they are displayed close to the pool.

**☎18** (in France) **or 112**

**FIRE SERVICE**

**☎15**

**AMBULANCE  
SERVICE**

(write the number that applies in your region)



**POISON CONTROL**

**CENTRE**




## SAFETY ADVICE

- This section is by no means a replacement for common sense or individual responsibility. Its aim is not to replace the vigilance of parents and/or responsible adults, who remain the essential factor in ensuring the protection of young children.
- **Warning:** safety is only guaranteed when the cover is closed, locked and correctly installed in compliance with the manufacturer's instructions.
- The cover must systematically be closed if you are absent from home, even for a very short period.
- Check that no persons and no foreign objects are in the pool before and during opening and closing operations.
- Store the devices and/or tools needed to operate the covers out of the reach of children.
- Operation of the mechanism must only be carried out by a responsible adult.
- With the exception of movable floors, movable terraces and the covering elements provided for this purpose (e.g. gratings), do not climb, walk or jump on a safety cover.
- Take all necessary measures to prevent access to the pool for young children until the cover is repaired or when a malfunction is observed that prevents closing or in case of temporary unavailability of the equipment or the pool.
- Respect the water levels designated by the manufacturer.
- Children must not play with the appliance.
- This appliance may be used by children aged 8 and over, and by persons with reduced physical, sensory or mental capabilities or lack of experience and knowledge if they have received supervision or instructions concerning the safe use of the appliance and understand the hazards involved.

A child can drown in less than 3 minutes, no type of protection can ever replace the watchful eye and vigilance of a responsible adult.

# RECYCLING

## PACKAGING



Dispose of the packaging in line with current rules and regulations.

## END OF LIFE CYCLE



- Do not put your scrapped equipment or used batteries in with unsorted household waste.
- You are responsible for disposing of all of your waste, in particular electrical and electronic equipment by taking it to a collection point where recycling and valorisation are carried out.
- Certain products potentially contain substances that are dangerous for the environment, and you need to ensure that these are eliminated or neutralised.
- Make sure that you are aware of all existing recovery and collection systems.



discard the manual in line with the current regulations.

## REGULATIONS

### STANDARD

- This cover complies with standard NF P90-308.

### WARRANTY CONDITION

log on to [www.del-piscine.fr](http://www.del-piscine.fr) to consult all our guarantees.



<https://www.del-piscine.fr/rechercher-une-garantie>

**SAS AQUALUX**  
ZAC DE LA MASSANE  
287 AVENUE DE LA MASSANE  
13210 ST RÉMY DE PROVENCE - FRANCE

☎ +33 (0)9 70 72 5000 / [INFO.FR@CF.GROUP](mailto:INFO.FR@CF.GROUP)

STAMP

A brand by CF group



ORIGINAL INSTRUCTIONS

A-DOTE057011 / 12 2023