### SOLID WINTER SAFETY COVER

Safety cover for swimming pools, designed to prevent access to the pool during winter for children under the age of 5. Another safety system must be used while the pool is in use.

READ carefully and keep for future reference. The user must be provided with the notice after assembly.



## LAKE HORS-SOL

Winter safety cover for swimming pools, designed to prevent access to the pool for children under the age of 5.

Compliant with the NF P 90-308 standard (December 2006)



## THE USER MUST BE PROVIDED WITH THE NOTICE AFTER ASSEMBLY READ CAREFULLY AND KEEP FOR FUTURE REFERENCE

### PACKAGING (e.g. - for a 5 x 10 m pool)



1 box of 0.80 x 0.60 x 0.40 m Total weight: 30 to 50 Kg

#### **TRANSPORT**



The goods are transported at the risk and peril of the recipient. If the recipient notes any damage that has occurred during transport when receiving the goods, they must immediately note their reservations on the carrier's delivery note. They must confirm these reservations within 48 hours by sending a registered letter to the carrier.

#### **DELIVERED ITEMS**








#### **ASSEMBLY INFO**



#### IN ORDER FOR YOUR COVER TO COMPLY WITH THE NF P 90-308 STANDARD

■ Structure and water level




- The pool must be equipped with an overflow system or a water level regulator.
- rainwater evacuation

- No variations in the height of surround caps is accepted.
- Above-ground or semi-inground pool with flat surround caps solidly attached to the structure.

Fabric compliant with the NF P 90-308 standard: resistance to tearing and abrasion

#### **INSTALLING THE COVER**

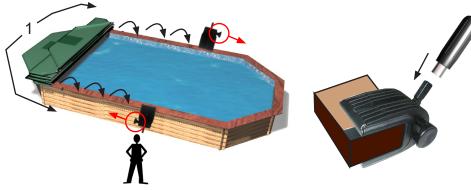

Tension = 1 or 2 "clicks"



- 1 Gradually unfold the cover starting with one width section and install a Wood'Lock clamp for each eyelet.
- Insert the eyelet into the pull rod, without tightening. Pay attention to the direction that the Wood'Lock clamps are installed in; the release handle must be on the left, and the pull rod in the raised position.
- After the cover is in position and all the Wood'Locks are installed, tighten the cover.
- 2 Go around the pool and lower the pull rod on each Wood'Lock clamp 1 or 2 "clicks" until the cover is tightened to maximum tension.

#### **OPENING UP THE POOL**


Unhook all the Wood'Locks.

Slide the cover onto the deck.

Clean and dry the equipment.

Clean and dry the cover before folding and storing in a dry place.

Pack everything away in the storage bag (OPTIONAL) and store in a dry, ventilated room away from light.



There are 3 steps to unlock.

- 1 Push the tension handle downwards.
- 2 Simultaneously pull on the release handle.
- 3 Holding the release position, raise the tension handle. Remove the eyelet from the pull rod and remove the cover.



#### **WINTERING**

- Close the cover.
- Do not lower the water level.
- Turn off the filtration.
- Remove snow regularly.

#### **UPKEEP** (USER'S RESPONSIBILITY)

The correct upkeep of your winter cover is the best way to guarantee a long product lifetime. Regularly clean the cover with a hose so that leaves do not accumulate and rot on top. Do not use abrasives or solvents to clean the cover.

#### **MAINTENANCE**

All maintenance operations must be performed by a professional, who will contact the manufacturer if necessary (details on the back of the document).

Only use original spare parts or parts compliant with the standard.

Regularly check the condition of the cover (Wood'Lock, cover seams and welds ...) at the beginning and end of wintering, or following any type of accident.

Replace the defective parts if they are damaged.

In windy regions, particular attention must be paid to the cover rubbing on the surround caps.

DEAR CLIENTS,

THANK YOU FOR THE CONFIDENCE YOU HAVE PLACED IN US BY CHOOSING ONE OF OUR COVERS.

YOU ARE ADVISED TO CAREFULLY READ THE FOLLOWING RECOMMENDATIONS.

· Your pool could be a serious danger to your children. Drowning can occur very quickly.

#### SAFETY TIPS

CHILDREN WHO ARE NEAR A SWIMMING POOL MUST BE CONSTANTLY AND ACTIVELY WATCHED, EVEN IF THEY KNOW HOW TO SWIM.

THE PHYSICAL PRESENCE OF A RESPONSIBLE ADULT IS ESSENTIAL WHEN THE POOL IS UNCOVERED.

**LEARN LIFE-SAVING TECHNIQUES** 

# MEMORISE THE EMERGENCY SERVICES' TELEPHONE NUMBERS AND DISPLAY THEM NEAR THE POOL.

- FIRE BRIGADE: 18 (FOR FRANCE) OR 112 FROM A MOBILE PHONE
- AMBULANCE SERVICE: 15 (FOR FRANCE)
- POISON CONTROL CENTRE:

.This cover is not a substitute for common sense or individual responsibility. It is also not intended to replace the supervision of responsible parents and/or adults who remain the essential factor for the protection of young children.

- · RESPECT THE WATER LEVELS DEFINED BY THE MANUFACTURER.
- · WARNING; SAFETY CAN ONLY BE GUARANTEED WITH A CLOSED AND LOCKED COVER THAT HAS BEEN CORRECTLY INSTALLED IN ACCORDANCE WITH THE MANUFACTURER'S INSTRUCTIONS.
- THE COVER MUST BE SYSTEMATICALLY INSTALLED EVEN WHEN THE HOME IS LEFT MOMENTARILY.
- · Ensure that no foreign objects or swimmers are in the pool before and during operations with the cover
- · STORE THE TOOLS FOR MANOEUVRING THE COVER OUT OF CHILDREN'S REACH.
- THE IMPLEMENTATION OF THE MECHANISM SHOULD ONLY BE UNDERTAKEN BY A RESPONSIBLE ADULT.
- · CLIMBING, WALKING OR JUMPING ON THE SAFETY COVER ARE PROHIBITED.
- · If a malfunction occurs that prevents the pool from being covered and secured, or if pool equipment is temporarily unavailable, take every possible measure to prevent young children from accessing the pool until the cover is able to be repaired.
- · CAREFULLY OBSERVE THE POOL DURING OPENING OR CLOSING OPERATIONS.
- · A CHILD CAN DROWN IN LESS THAN 3 MINUTES; NO MEANS OF PROTECTION WILL EVER REPLACE THE SUPERVISION AND VIGILANCE OF A RESPONSIBLE ADULT.



SWIMMING POOL

MANUFACTURER AND INSTALLER